

Package ‘ricu’

May 9, 2026

Title Intensive Care Unit Data with R

Description Focused on (but not exclusive to) data sets hosted on PhysioNet (<<https://physionet.org>>), 'ricu' provides utilities for download, setup and access of intensive care unit (ICU) data sets. In addition to functions for running arbitrary queries against available data sets, a system for defining clinical concepts and encoding their representations in tabular ICU data is presented.

Version 0.6.3

License GPL-3

Encoding UTF-8

Language en-US

URL <https://github.com/eth-mds/ricu>, <https://physionet.org>

BugReports <https://github.com/eth-mds/ricu/issues>

Depends R (>= 3.5.0)

Imports data.table, curl, assertthat, fst, readr, jsonlite, methods, stats, prt (>= 0.1.2), tibble, backports, rlang, vctrs, cli (>= 2.1.0), fansi, openssl, utils

Suggests xml2, covr, testthat (>= 3.0.0), withr, mockthat, pkgload, mimic.demo, eicu.demo, progress, knitr, rmarkdown, ggplot2, cowplot, survival, forestmodel, rtables, kableExtra, units, pdftools, magick, pillar

RoxygenNote 7.3.2

Additional_repositories <https://eth-mds.github.io/physionet-demo>

VignetteBuilder knitr

Config/testthat/edition 3

NeedsCompilation no

Author Nicolas Bennett [aut, cre],
Drago Plecko [aut],
Ida-Fong Ukor [aut]

Maintainer Nicolas Bennett <r@nbenn.ch>

Repository CRAN

Date/Publication 2025-09-03 21:50:09 UTC

Contents

attach_src	2
change_id	5
data	7
data_dir	11
download_src	14
expand	16
id_tbl	20
id_vars	23
import_src	26
load_concepts	28
load_dictionary	33
load_id	36
load_src	39
load_src_cfg	42
min_or_na	46
msg_progress	48
new_cncpt	49
new_itm	52
pafi	55
rename_cols	58
secs	62
sep3	62
setup_src_data	64
sirs_score	65
sofa_score	66
stay_windows	68
susp_inf	69
transform_fun	71
write_psv	73

Index	75
--------------	-----------

attach_src	<i>Data attach utilities</i>
------------	------------------------------

Description

Making a dataset available to `ricu` consists of 3 steps: downloading (`download_src()`), importing (`import_src()`) and attaching (`attach_src()`). While downloading and importing are one-time procedures, attaching of the dataset is repeated every time the package is loaded. Briefly, downloading loads the raw dataset from the internet (most likely in `.csv` format), importing consists of some preprocessing to make the data available more efficiently and attaching sets up the data for use by the package.

Usage

```
attach_src(x, ...)

## S3 method for class 'src_cfg'
attach_src(x, assign_env = NULL, data_dir = src_data_dir(x), ...)

## S3 method for class 'character'
attach_src(x, assign_env = NULL, data_dir = src_data_dir(x), ...)

detach_src(x)

setup_src_env(x, ...)

## S3 method for class 'src_cfg'
setup_src_env(x, data_dir = src_data_dir(x), link_env = NULL, ...)
```

Arguments

x	Data source to attach
...	Forwarded to further calls to <code>attach_src()</code>
assign_env, link_env	Environment in which the data source will become available
data_dir	Directory used to look for <code>fst::fst()</code> files; NULL calls <code>data_dir()</code> using the source name as subdir argument

Details

Attaching a dataset sets up two types of S3 classes: a single `src_env` object, containing as many `src_tbl` objects as tables are associated with the dataset. A `src_env` is an environment with an `id_cfg` attribute, as well as sub-classes as specified by the data source `class_prefix` configuration setting (see `load_src_cfg()`). All `src_env` objects created by calling `attach_src()` represent environments that are direct descendants of the data environment and are bound to the respective dataset name within that environment. For more information on `src_env` and `src_tbl` objects, refer to `new_src_tbl()`.

If set up correctly, it is not necessary for the user to directly call `attach_src()`. When the package is loaded, the default data sources (see `auto_attach_srcs()`) are attached automatically. This default can be controlled by setting as environment variable `RICU_SRC_LOAD` a comma separated list of data source names before loading the library. Setting this environment variable as

```
Sys.setenv(RICU_SRC_LOAD = "mimic_demo,eicu_demo")
```

will change the default of loading both MIMIC-III and eICU, alongside the respective demo datasets, as well as HiRID and AUMC, to just the two demo datasets. For setting an environment variable upon startup of the R session, refer to `base::.First.sys()`.

Attaching a dataset during package namespace loading will both instantiate a corresponding `src_env` in the data environment and for convenience also assign this object into the package namespace, such that for example the MIMIC-III demo dataset not only is available as `ricu::data::mimic_demo`,

but also as `ricu::mimic_demo` (or if the package namespace is attached, simply as `mimic_demo`). Dataset attaching using `attach_src()` does not need to happen during namespace loading, but can be triggered by the user at any time. If such a convenience link as described above is desired by the user, an environment such as `.GlobalEnv` has to be passed as `assign_env` to `attach_src()`.

Data sets are set up as `src_env` objects irrespective of whether all (or any) of the required data is available. If some (or all) data is missing, the user is asked for permission to download in interactive sessions and an error is thrown in non-interactive sessions. Downloading demo datasets requires no further information but access to full-scale datasets (even though they are publicly available) is guarded by access credentials (see [download_src\(\)](#)).

While `attach_src()` provides the main entry point, `src_env` objects are instantiated by the S3 generic function `setup_src_env()` and the wrapping function serves to catch errors that might be caused by config file parsing issues as to not break attaching of the package namespace. Apart from this, `attach_src()` also provides the convenience linking into the package namespace (or a user-specified environment) described above.

A `src_env` object created by `setup_src_env()` does not directly contain `src_tbl` objects bound to names, but rather an active binding (see [base::makeActiveBinding\(\)](#)) per table. These active bindings check for availability of required files and evaluate to corresponding `src_tbl` objects if these checks are passed and ask for user input otherwise. As `src_tbl` objects are intended to be read-only, assignment is not possible except for the value `NULL` which resets the internally cached `src_tbl` that is created on first successful access.

Value

Both `attach_src()` and `setup_src_env()` are called for side effects and therefore return invisibly. While `attach_src()` returns `NULL`, `setup_src_env()` returns the newly created `src_env` object.

Examples

```
## Not run:

Sys.setenv(RICU_SRC_LOAD = "")
library(ricu)

ls(envir = data)
exists("mimic_demo")

attach_src("mimic_demo", assign_env = .GlobalEnv)

ls(envir = data)
exists("mimic_demo")

mimic_demo

## End(Not run)
```

change_id	<i>Switch between id types</i>
-----------	--------------------------------

Description

ICU datasets such as MIMIC-III or eICU typically represent patients by multiple ID systems such as patient IDs, hospital stay IDs and ICU admission IDs. Even if the raw data is available in only one such ID system, given a mapping of IDs alongside start and end times, it is possible to convert data from one ID system to another. The function `change_id()` provides such a conversion utility, internally either calling `upgrade_id()` when moving to an ID system with higher cardinality and `downgrade_id()` when the target ID system is of lower cardinality

Usage

```
change_id(x, target_id, src, ..., keep_old_id = TRUE, id_type = FALSE)
```

```
upgrade_id(x, target_id, src, cols = time_vars(x), ...)
```

```
downgrade_id(x, target_id, src, cols = time_vars(x), ...)
```

```
## S3 method for class 'ts_tbl'
upgrade_id(x, target_id, src, cols = time_vars(x), ...)
```

```
## S3 method for class 'id_tbl'
upgrade_id(x, target_id, src, cols = time_vars(x), ...)
```

```
## S3 method for class 'ts_tbl'
downgrade_id(x, target_id, src, cols = time_vars(x), ...)
```

```
## S3 method for class 'id_tbl'
downgrade_id(x, target_id, src, cols = time_vars(x), ...)
```

Arguments

<code>x</code>	icu_tbl object for which to make the id change
<code>target_id</code>	The destination id name
<code>src</code>	Passed to <code>as_id_cfg()</code> and <code>as_src_env()</code>
<code>...</code>	Passed to <code>upgrade_id()/downgrade_id()</code>
<code>keep_old_id</code>	Logical flag indicating whether to keep the previous ID column
<code>id_type</code>	Logical flag indicating whether <code>target_id</code> is specified as ID name (e.g. <code>icustay_id</code> on MIMIC) or ID type (e.g. <code>icustay</code>)
<code>cols</code>	Column names that require time-adjustment

Details

In order to provide ID system conversion for a data source, the (internal) function `id_map()` must be able to construct an ID mapping for that data source. Constructing such a mapping can be expensive w.r.t. the frequency it might be re-used and therefore, `id_map()` provides caching infrastructure. The mapping itself is constructed by the (internal) function `id_map_helper()`, which is expected to provide source and destination ID columns as well as start and end columns corresponding to the destination ID, relative to the source ID system. In the following example, we request for `mimic_demo`, with ICU stay IDs as source and hospital admissions as destination IDs.


```
id_map_helper(mimic_demo, "icustay_id", "hadm_id")
#> # An `id_tbl`: 136 x 4
#> # Id var:      `icustay_id`
#>   icustay_id hadm_id hadm_id_start hadm_id_end
#>   <int>      <int> <drtn>         <drtn>
#> 1      201006  198503 -3291 mins    9113 mins
#> 2      201204  114648  -2 mins     6949 mins
#> 3      203766  126949 -1336 mins   8818 mins
#> 4      204132  157609  -1 mins    10103 mins
#> 5      204201  177678  -369 mins   9444 mins
#> ...
#> 132     295043  170883 -10413 mins  31258 mins
#> 133     295741  176805  -2 mins     3152 mins
#> 134     296804  110244 -1295 mins   4598 mins
#> 135     297782  167612  -1 mins      207 mins
#> 136     298685  151323  -1 mins    19082 mins
#> # i 131 more rows
```

Both start and end columns encode the hospital admission windows relative to each corresponding ICU stay start time. It therefore comes as no surprise that most start times are negative (hospital admission typically occurs before ICU stay start time), while end times are often days in the future (as hospital discharge typically occurs several days after ICU admission).

In order to use the ID conversion infrastructure offered by `ricu` for a new dataset, it typically suffices to provide an `id_cfg` entry in the source configuration (see `load_src_cfg()`), outlining the available ID systems alongside an ordering, as well as potentially a class specific implementation of `id_map_helper()` for the given source class, specifying the corresponding time windows in 1 minute resolution (for every possible pair of IDs).

While both up- and downgrades for `id_tbl` objects, as well as downgrades for `ts_tbl` objects are simple merge operations based on the ID mapping provided by `id_map()`, ID upgrades for `ts_tbl` objects are slightly more involved. As an example, consider the following setting: we have data associated with `hadm_id` IDs and times relative to hospital admission:

	1	2	3	4	5	6	7	8
data	---	---	---	---	---	---	---	---
	3h	10h	18h	27h	35h	43h	52h	59h
				HADM_1				
	0h	7h		26h	37h		53h	62h



The mapping of data points from `hadm_id` to `icustay_id` is created as follows: ICU stay end times mark boundaries and all data that is recorded after the last ICU stay ended is assigned to the last ICU stay. Therefore data points 1-3 are assigned to ICU_1, while 4-8 are assigned to ICU_2. Times have to be shifted as well, as timestamps are expected to be relative to the current ID system. Data points 1-3 therefore are assigned to time stamps -4h, 3h and 11h, while data points 4-8 are assigned to -10h, -2h, 6h, 15h and 22h. Implementation-wise, the mapping is computed using an efficient `data.table` rolling join.

Value

An object of the same type as `x` with modified IDs.

Examples

```
if (require(mimic.demo)) {
tbl <- mimic_demo$labevents
dat <- load_difftime(tbl, itemid == 50809, c("charttime", "valuenum"))
dat

change_id(dat, "icustay_id", tbl, keep_old_id = FALSE)
}
```

data

ICU datasets

Description

The [Laboratory for Computational Physiology](#) (LCP) at MIT hosts several large-scale databases of hospital intensive care units (ICUs), two of which can be either downloaded in full ([MIMIC-III](#) and [eICU](#)) or as demo subsets ([MIMIC-III demo](#) and [eICU demo](#)), while a third data set is available only in full ([HiRID](#)). While demo data sets are freely available, full download requires credentialed access which can be gained by applying for an account with [PhysioNet](#). Even though registration is required, the described datasets are all publicly available. With [AmsterdamUMCdb](#), a non-PhysioNet hosted data source is available as well. As with the PhysioNet datasets, access is public but has to be granted by the data collectors.

Usage

data

Format

The exported data environment contains all datasets that have been made available to `ricu`. For datasets that are attached during package loading (see `attach_src()`), shortcuts to the datasets are set up in the package namespace, allowing the object `ricu::data::mimic_demo` to be accessed as `ricu::mimic_demo` (or in case the package namespace has been attached, simply as `mimic_demo`). Datasets that are made available after the package namespace has been sealed will have their proxy object by default located in `.GlobalEnv`. Datasets are represented by `src_env` objects, while individual tables are `src_tbl` and do not represent in-memory data, but rather data stored on disk, subsets of which can be loaded into memory.

Details

Setting up a dataset for use with `ricu` requires a configuration object. For the included datasets, configuration can be loaded from

```
system.file("extdata", "config", "data-sources.json", package = "ricu")
```

by calling `load_src_cfg()` and for dataset that are external to `ricu`, additional configuration can be made available by setting the environment variable `RICU_CONFIG_PATH` (for more information, refer to `load_src_cfg()`). Using the dataset configuration object, data can be downloaded (`download_src()`), imported (`import_src()`) and attached (`attach_src()`). While downloading and importing are one-time procedures, attaching of the dataset is repeated every time the package is loaded. Briefly, downloading loads the raw dataset from the internet (most likely in `.csv` format), importing consists of some preprocessing to make the data available more efficiently (by converting it to `.fst` format) and attaching sets up the data for use by the package. For more information on the individual steps, refer to the respective documentation pages.

A dataset that has been successfully made available can interactively be explored by typing its name into the console and individual tables can be inspected using the `$` function. For example for the MIMIC-III demo dataset and the `icustays` table, this gives

```
mimic_demo
#> <mimic_demo_env[25]>
#>      admissions      callout      caregivers      chartevents
#>      [129 x 19]      [77 x 24]      [7,567 x 4]      [758,355 x 15]
#>      cptevents      d_cpt      d_icd_diagnoses      d_icd_procedures
#>      [1,579 x 12]      [134 x 9]      [14,567 x 4]      [3,882 x 4]
#>      d_items      d_labitems      datetimeevents      diagnoses_icd
#>      [12,487 x 10]      [753 x 6]      [15,551 x 14]      [1,761 x 5]
#>      drgcodes      icustays      inpatientevents_cv      inpatientevents_mv
#>      [297 x 8]      [136 x 12]      [34,799 x 22]      [13,224 x 31]
#>      labevents      microbiologyevents      outputevents      patients
#>      [76,074 x 9]      [2,003 x 16]      [11,320 x 13]      [100 x 8]
#>      prescriptions      procedureevents_mv      procedures_icd      services
#>      [10,398 x 19]      [753 x 25]      [506 x 5]      [163 x 6]
#>      transfers
#>      [524 x 13]
mimic_demo$icustays
#> # <mimic_tbl>: [136 x 12]
```

```

#> # ID options:  subject_id (patient) < hadm_id (hadm) < icustay_id (icustay)
#> # Defaults:    `intime` (index), `last_careunit` (val)
#> # Time vars:   `intime`, `outtime`
#>   row_id subject_id hadm_id icustay_id dbsource  first_careunit last_careunit
#>   <int>   <int>   <int>   <int> <chr>      <chr>          <chr>
#> 1    12742     10006  142345   206504 carevue    MICU           MICU
#> 2    12747     10011  105331   232110 carevue    MICU           MICU
#> 3    12749     10013  165520   264446 carevue    MICU           MICU
#> 4    12754     10017  199207   204881 carevue    CCU            CCU
#> 5    12755     10019  177759   228977 carevue    MICU           MICU
#> ...
#> 132 42676      44083  198330   286428 metavision CCU            CCU
#> 133 42691      44154  174245   217724 metavision MICU           MICU
#> 134 42709      44212  163189   239396 metavision MICU           MICU
#> 135 42712      44222  192189   238186 metavision CCU            CCU
#> 136 42714      44228  103379   217992 metavision SICU           SICU
#> # i 131 more rows
#> # i 5 more variables: first_wardid <int>, last_wardid <int>, intime <dtm>,
#> #   outtime <dtm>, los <dbl>

```

Table subsets can be loaded into memory for example using the `base::subset()` function, which uses non-standard evaluation (NSE) to determine a row-subsetting. This design choice stems from the fact that some tables can have on the order of 10^8 rows, which makes loading full tables into memory an expensive operation. Table subsets loaded into memory are represented as `data.table` objects. Extending the above example, if only ICU stays corresponding to the patient with `subject_id == 10124` are of interest, the respective data can be loaded as

```

subset(mimic_demo$icustays, subject_id == 10124)
#>   row_id subject_id hadm_id icustay_id dbsource  first_careunit last_careunit
#>   <int>   <int>   <int>   <int>  <char>      <char>          <char>
#> 1:  12863     10124  182664   261764 carevue    MICU           MICU
#> 2:  12864     10124  170883   222779 carevue    MICU           MICU
#> 3:  12865     10124  170883   295043 carevue    CCU            CCU
#> 4:  12866     10124  170883   237528 carevue    MICU           MICU
#>   first_wardid last_wardid      intime      outtime      los
#>   <int>        <int>        <POSct>    <POSct>    <num>
#> 1:           23           23 2192-03-29 10:46:51 2192-04-01 06:36:00 2.8258
#> 2:           50           50 2192-04-16 20:58:32 2192-04-20 08:51:28 3.4951
#> 3:            7            7 2192-04-24 02:29:49 2192-04-26 23:59:45 2.8958
#> 4:           23           23 2192-04-30 14:50:44 2192-05-15 23:34:21 15.3636

```

Much care has been taken to make `ricu` extensible to new datasets. For example the publicly available ICU database `AmsterdamUMCdb` provided by the Amsterdam University Medical Center, currently is not part of the core datasets of `ricu`, but code for integrating this dataset is available on [github](#).

MIMIC-III

The Medical Information Mart for Intensive Care (**MIMIC**) database holds detailed clinical data from roughly 60,000 patient stays in Beth Israel Deaconess Medical Center (BIDMC) intensive

care units between 2001 and 2012. The database includes information such as demographics, vital sign measurements made at the bedside (~1 data point per hour), laboratory test results, procedures, medications, caregiver notes, imaging reports, and mortality (both in and out of hospital). For further information, please refer to the [MIMIC-III documentation](#).

The corresponding [demo dataset](#) contains the full data of a randomly selected subset of 100 patients from the patient cohort with conformed in-hospital mortality. The only notable data omission is the `noteevents` table, which contains unstructured text reports on patients.

eICU

More recently, Philips Healthcare and LCP began assembling the [eICU Collaborative Research Database](#) as a multi-center resource for ICU data. Combining data of several critical care units throughout the continental United States from the years 2014 and 2015, this database contains de-identified health data associated with over 200,000 admissions, including vital sign measurements, care plan documentation, severity of illness measures, diagnosis information, and treatment information. For further information, please refer to the [eICU documentation](#).

For the [demo subset](#), data associated with ICU stays for over 2,500 unit stays selected from 20 of the larger hospitals is included. An important caveat that applied to the eICU-based datasets is considerable variability among the large number of hospitals in terms of data availability.

HiRID

Moving to higher time-resolution, [HiRID](#) is a freely accessible critical care dataset containing data relating to almost 34,000 patient admissions to the Department of Intensive Care Medicine of the Bern University Hospital, Switzerland. The dataset contains de-identified demographic information and a total of 681 routinely collected physiological variables, diagnostic test results and treatment parameters, collected during the period from January 2008 to June 2016. Dependent on the type of measurement, time resolution can be on the order of 2 minutes.

AmsterdamUMCdb

With similar time-resolution (for vital-sign measurements) as [HiRID](#), [AmsterdamUMCdb](#) contains data from 23,000 admissions of adult patients from 2003-2016 to the department of Intensive Care, of Amsterdam University Medical Center. In total, nearly 10^9 individual observations consisting of vitals signs, clinical scoring systems, device data and lab results data, as well as nearly $5 \cdot 10^6$ million medication entries, alongside de-identified demographic information corresponding to the 20,000 individual patients is spread over 7 tables.

MIMIC-IV

The latest v2.2 release of MIMIC-IV is available in added in `ricu`. Building on the success of MIMIC-III, this next iteration contains data on patients admitted to an ICU or the emergency department between 2008 - 2019 at BIDMC. Therefore, relative to MIMIC-III, patients admitted prior to 2008 (whose data is stored in a CareVue-based system) has been removed, while data onward of 2012 has been added. This simplifies data queries considerably, as the CareVue/MetaVision data split in MIMIC-III no longer applies. While addition of ED data is planned, this is not part of the initial v1.0 release and currently is not supported by `ricu`. For further information, please refer to the [MIMIC-III documentation](#).

SICdb

The Salzburg ICU database (SICdb) originates from the University Hospital of Salzburg. In `ricu`, version v1.0.6 is currently supported. For further information, please refer to the [SICdb documentation](#).

References

Johnson, A., Pollard, T., & Mark, R. (2016). MIMIC-III Clinical Database (version 1.4). PhysioNet. <https://doi.org/10.13026/C2XW26>.

MIMIC-III, a freely accessible critical care database. Johnson AEW, Pollard TJ, Shen L, Lehman L, Feng M, Ghassemi M, Moody B, Szolovits P, Celi LA, and Mark RG. *Scientific Data* (2016). DOI: 10.1038/sdata.2016.35.

Johnson, A., Pollard, T., Badawi, O., & Raffa, J. (2019). eICU Collaborative Research Database Demo (version 2.0). PhysioNet. <https://doi.org/10.13026/gxmm-es70>.

The eICU Collaborative Research Database, a freely available multi-center database for critical care research. Pollard TJ, Johnson AEW, Raffa JD, Celi LA, Mark RG and Badawi O. *Scientific Data* (2018). DOI: <http://dx.doi.org/10.1038/sdata.2018.178>.

Faltys, M., Zimmermann, M., Lyu, X., Hüser, M., Hyland, S., Rättsch, G., & Merz, T. (2020). HiRID, a high time-resolution ICU dataset (version 1.0). PhysioNet. <https://doi.org/10.13026/hz5m-md48>.

Hyland, S.L., Faltys, M., Hüser, M. et al. Early prediction of circulatory failure in the intensive care unit using machine learning. *Nat Med* 26, 364–373 (2020). <https://doi.org/10.1038/s41591-020-0789-4>

Thoral PJ, Peppink JM, Driessen RH, et al (2020) AmsterdamUMCdb: The First Freely Accessible European Intensive Care Database from the ESICM Data Sharing Initiative. <https://www.amsterdammedicaldatascience.nl>.

Elbers, Dr. P.W.G. (Amsterdam UMC) (2019): AmsterdamUMCdb v1.0.2. DANS. <https://doi.org/10.17026/dans-22u-f8vd>

Johnson, A., Bulgarelli, L., Pollard, T., Horng, S., Celi, L. A., & Mark, R. (2021). MIMIC-IV (version 1.0). PhysioNet. <https://doi.org/10.13026/s6n6-xd98>.

Goldberger, A., Amaral, L., Glass, L., Hausdorff, J., Ivanov, P. C., Mark, R., ... & Stanley, H. E. (2000). PhysioBank, PhysioToolkit, and PhysioNet: Components of a new research resource for complex physiologic signals. *Circulation (Online)*. 101 (23), pp. e215–e220.

data_dir

File system utilities

Description

Determine the location where to place data meant to persist between individual sessions.

Usage

```

data_dir(subdir = NULL, create = TRUE)

src_data_dir(srcs)

auto_attach_srcs()

config_paths()

get_config(name, cfg_dirs = config_paths(), combine_fun = c, ...)

set_config(x, name, dir = file.path("inst", "extdata", "config"), ...)

```

Arguments

subdir	A string specifying a directory that will be made sure to exist below the data directory.
create	Logical flag indicating whether to create the specified directory
srcs	Character vector of data source names, an object for which an <code>src_name()</code> method is defined or an arbitrary-length list thereof.
name	File name of the configuration file (<code>.json</code> will be appended)
cfg_dirs	Character vector of directories searched for config files
combine_fun	If multiple files are found, a function for combining returned lists
...	Passed to <code>jsonlite::read_json()</code> or <code>jsonlite::write_json()</code>
x	Object to be written
dir	Directory to write the file to (created if non-existent)

Details

For data, the default location depends on the operating system as

Platform	Location
Linux	~/.local/share/ricu
macOS	~/Library/Application Support/ricu
Windows	%LOCALAPPDATA%/ricu

If the default storage directory does not exist, it will only be created upon user consent (requiring an interactive session).

The environment variable `RICU_DATA_PATH` can be used to overwrite the default location. If desired, this variable can be set in an R startup file to make it apply to all R sessions. For example, it could be set within:

- A project-local `.Renviron`;
- The user-level `.Renviron`;

- A file at $\$(R_RHOME)/etc/Renviron.site$.

Any directory specified as environment variable will recursively be created.

Data source directories typically are sub-directories to `data_dir()` named the same as the respective dataset. For demo datasets corresponding to `mimic` and `eicu`, file location however deviates from this scheme. The function `src_data_dir()` is used to determine the expected data location of a given dataset.

Configuration files used both for data source configuration, as well as for dictionary definitions potentially involve multiple files that are read and merged. For that reason, `get_config()` will iterate over directories passed as `cfg_dirs` and look for the specified file (with suffix `.json` appended and might be missing in some of the queried directories). All found files are read by `jsonlite::read_json()` and the resulting lists are combined by reduction with the binary function passed as `combine_fun`.

With default arguments, `get_config()` will simply concatenate lists corresponding to files found in the default config locations as returned by `config_paths()`: first the directory specified by the environment variable `RICU_CONFIG_PATH` (if set), followed by the directory at

```
system.file("extdata", "config", package = "ricu")
```

Further arguments are passed to `jsonlite::read_json()`, which is called with slightly modified defaults: `simplifyVector = TRUE`, `simplifyDataFrame = FALSE` and `simplifyMatrix = FALSE`.

The utility function `set_config()` writes the list passed as `x` to file `dir/name.json`, using `jsonlite::write_json()` also with slightly modified defaults (which can be overridden by passing arguments as `...`): `null = "null"`, `auto_unbox = TRUE` and `pretty = TRUE`.

Whenever the package namespace is attached, a summary of dataset availability is printed using the utility functions `auto_attach_srcs()` and `src_data_avail()`. While the former simply returns a character vector of data sources that are configured for automatically being set up on package loading, the latter returns a summary of the number of available tables per dataset. Finally, `is_data_avail()` returns a named logical vector indicating which data sources have all required data available.

Value

Functions `data_dir()`, `src_data_dir()` and `config_paths()` return file paths as character vectors, `auto_attach_srcs()` returns a character vector of data source names, `src_data_avail()` returns a data frame describing availability of data sources and `is_data_avail()` a named logical vector. Configuration utilities `get_config()` and `set_config()` read and write list objects to/from JSON format.

Examples

```
Sys.setenv(RICU_DATA_PATH = tempdir())
identical(data_dir(), tempdir())

dir.exists(file.path(tempdir(), "some_subdir"))
some_subdir <- data_dir("some_subdir")
dir.exists(some_subdir)
```

```

cfg <- get_config("concept-dict")

identical(
  cfg,
  get_config("concept-dict",
            system.file("extdata", "config", package = "ricu"))
)

```

download_src

Data download utilities

Description

Making a dataset available to `ricu` consists of 3 steps: downloading (`download_src()`), importing (`import_src()`) and attaching (`attach_src()`). While downloading and importing are one-time procedures, attaching of the dataset is repeated every time the package is loaded. Briefly, downloading loads the raw dataset from the internet (most likely in `.csv` format), importing consists of some preprocessing to make the data available more efficiently (by converting it to `.fst` format) and attaching sets up the data for use by the package.

Usage

```

download_src(x, data_dir = src_data_dir(x), ...)

## S3 method for class 'src_cfg'
download_src(x, data_dir = src_data_dir(x), tables = NULL, force = FALSE, ...)

## S3 method for class 'aumc_cfg'
download_src(
  x,
  data_dir = src_data_dir(x),
  tables = NULL,
  force = FALSE,
  token = NULL,
  verbose = TRUE,
  ...
)

## S3 method for class 'character'
download_src(
  x,
  data_dir = src_data_dir(x),
  tables = NULL,
  force = FALSE,
  user = NULL,
  pass = NULL,
  verbose = TRUE,
)

```

```
    ...
  )
```

Arguments

x	Object specifying the source configuration
data_dir	Destination directory where the downloaded data is written to.
...	Generic consistency
tables	Character vector specifying the tables to download. If NULL, all available tables are downloaded.
force	Logical flag; if TRUE, existing data will be re-downloaded
token	Download token for AmsterdamUMCdb (see 'Details')
verbose	Logical flag indicating whether to print progress information
user, pass	PhysioNet credentials; if NULL and environment variables RICU_PHYSIONET_USER/RICU_PHYSIONET_PASS are not set, user input is required

Details

Downloads by `ricu` are focused data hosted by [PhysioNet](#) and tools are currently available for downloading the datasets [MIMIC-III](#), [eICU](#) and [HiRID](#) (see [data](#)). While credentials are required for downloading any of the three datasets, demo dataset for both MIMIC-III and eICU are available without having to log in. Even though access to full dataset is credentialed, the datasets are in fact publicly available. For setting up an account, please refer to [the registration form](#).

PhysioNet credentials can either be entered in an interactive session, passed as function arguments `user/pass` or as environment variables `RICU_PHYSIONET_USER/RICU_PHYSIONET_PASS`. For setting environment variables on session startup, refer to `base::.First.sys()` and for setting environment variables in general, refer to `base::Sys.setenv()` If the `openssl` package is available, SHA256 hashes of downloaded files are verified using `openssl::sha256()`.

Demo datasets [MIMIC-III demo](#) and [eICU demo](#) can either be installed as R packages directly by running

```
install.packages(
  c("mimic.demo", "eicu.demo"),
  repos = "https://eth-mds.github.io/physionet-demo"
)
```

or downloaded and imported using `download_src()` and `import_src()`. Furthermore, `ricu` specifies `mimic.demo` and `eicu.demo` as Suggests dependencies therefore, passing `dependencies = TRUE` when calling `install.packages()` for installing `ricu`, this will automatically install the demo datasets as well.

While the included data downloaders are intended for data hosted by PhysioNet, `download_src()` is an S3 generic function that can be extended to new classes. Method dispatch is intended to occur on objects that inherit from or can be coerced to `src_cfg`. For more information on data source configuration, refer to `load_src_cfg()`.

As such, with the addition of the AmsterdamUMCdb dataset, which unfortunately is not hosted on PhysioNet, A separate downloader for that dataset is available as well. Currently this requires

both availability of the CRAN package `xml2`, as well as the command line utility `7zip`. Furthermore, data access has to be **requested** and for non-interactive download the download token has to be made available as environment variable `RICU_AUMC_TOKEN` or passed as `token` argument to `download_src()`. The download token can be retrieved from the URL provided when granted access as by extracting the string followed by `token=`:

```
https://example.org/?s=download&token=0c27af59-72d1-0349-aa59-00000a8076d9
```

would translate to

```
Sys.setenv(RICU_AUMC_TOKEN = "0c27af59-72d1-0349-aa59-00000a8076d9")
```

If the dependencies outlined above are not fulfilled, download and archive extraction can be carried out manually into the corresponding folder and `import_src()` can be run.

Value

Called for side effects and returns `NULL` invisibly.

Examples

```
## Not run:

dir <- tempdir()
list.files(dir)

download_datasource("mimic_demo", data_dir = dir)
list.files(dir)

unlink(dir, recursive = TRUE)

## End(Not run)
```

expand

Time series utility functions

Description

ICU data as handled by `ricu` is mostly comprised of time series data and as such, several utility functions are available for working with time series data in addition to a class dedicated to representing time series data (see `ts_tbl()`). Some terminology to begin with: a time series is considered to have gaps if, per (combination of) ID variable value(s), some time steps are missing. Expanding and collapsing mean to change between representations where time steps are explicit or encoded as interval with start and end times. For sliding window-type operations, `slide()` means to iterate over time-windows, `slide_index()` means to iterate over certain time-windows, selected relative to the index and `hop()` means to iterate over time-windows selected in absolute terms.

Usage

```
expand(  
  x,  
  start_var = index_var(x),  
  end_var = NULL,  
  step_size = time_step(x),  
  new_index = start_var,  
  keep_vars = NULL,  
  aggregate = FALSE  
)  
  
collapse(  
  x,  
  id_vars = NULL,  
  index_var = NULL,  
  start_var = "start",  
  end_var = "end",  
  env = NULL,  
  as_win_tbl = TRUE,  
  ...  
)  
  
has_no_gaps(x)  
  
has_gaps(...)  
  
is_regular(x)  
  
fill_gaps(x, limits = collapse(x), start_var = "start", end_var = "end")  
  
remove_gaps(x)  
  
slide(x, expr, before, after = hours(0L), ...)  
  
slide_index(x, expr, index, before, after = hours(0L), ...)  
  
hop(  
  x,  
  expr,  
  windows,  
  full_window = FALSE,  
  lwr_col = "min_time",  
  upr_col = "max_time",  
  left_closed = TRUE,  
  right_closed = TRUE,  
  eval_env = NULL,  
  ...  
)
```

Arguments

x	ts_tbl object to use
start_var, end_var	Name of the columns that represent lower and upper windows bounds
step_size	Controls the step size used to interpolate between start_var and end_var
new_index	Name of the new index column
keep_vars	Names of the columns to hold onto
aggregate	Function for aggregating values in overlapping intervals
id_vars, index_var	ID and index variables
env	Environment used as parent to the environment used to evaluate expressions passes as ...
as_win_tbl	Logical flag indicating whether to return a win_tbl or an id_tbl
...	Passed to hop_quo() and ultimately to <code>data.table::[]()</code>
limits	A table with columns for lower and upper window bounds or a length 2 difftime vector
expr	Expression (quoted for *_quo and unquoted otherwise) to be evaluated over each window
before, after	Time span to look back/forward
index	A vector of times around which windows are spanned (relative to the index)
windows	An icu_tbl defining the windows to span
full_window	Logical flag controlling how the situation is handled where the sliding window extends beyond available data
lwr_col, upr_col	Names of columns (in windows) of lower/upper window bounds
left_closed, right_closed	Logical flag indicating whether intervals are closed (default) or open.
eval_env	Environment in which expr is substituted; NULL resolves to the environment in which expr was created

Details

A gap in a ts_tbl object is a missing time step, i.e. a missing entry in the sequence `seq(min(index), max(index), by = interval)` in at least one group (as defined by `id_vars()`, where the extrema are calculated per group. In this case, `has_gaps()` will return TRUE. The function `is_regular()` checks whether the time series has no gaps, in addition to the object being sorted and unique (see `is_sorted()` and `is_unique()`). In order to transform a time series containing gaps into a regular time series, `fill_gaps()` will fill missing time steps with NA values in all `data_vars()` columns, while `remove_gaps()` provides the inverse operation of removing time steps that consist of NA values in `data_vars()` columns.

An `expand()` operation performed on an object inheriting from `data.table` yields a `ts_tbl` where time-steps encoded by columns `start_var` and `end_var` are made explicit with values in `keep_vars` being appropriately repeated. The inverse operation is available as `collapse()`, which groups

by `id_vars`, represents `index_var` as group-wise extrema in two new columns `start_var` and `end_var` and allows for further data summary using `...`. An aspect to keep in mind when applying `expand()` to a `win_tbl` object is that values simply are repeated for all time-steps that fall into a given validity interval. This gives correct results when a `win_tbl` for example contains data on infusions as rates, but might not lead to correct results when infusions are represented as drug amounts administered over a given time-span. In such a scenario it might be desirable to evenly distribute the total amount over the corresponding time steps (currently not implemented).

Sliding-window type operations are available as `slide()`, `slide_index()` and `hop()` (function naming is inspired by the CRAN package `slider`). The most flexible of the three, `hop` takes as input a `ts_tbl` object `x` containing the data, an `id_tbl` object `windows`, containing for each ID the desired windows represented by two columns `lwr_col` and `upr_col`, as well as an expression `expr` to be evaluated per window. At the other end of the spectrum, `slide()` spans windows for every ID and available time-step using the arguments `before` and `after`, while `slide_index()` can be seen as a compromise between the two, where windows are spanned for certain time-points, specified by `index`.

Value

Most functions return `ts_tbl` objects with the exception of `has_gaps()/has_no_gaps()/is_regular()`, which return logical flags.

Examples

```
if (FALSE) {
tbl <- ts_tbl(x = 1:5, y = hours(1:5), z = hours(2:6), val = rnorm(5),
             index_var = "y")
exp <- expand(tbl, "y", "z", step_size = 1L, new_index = "y",
             keep_vars = c("x", "val"))
col <- collapse(exp, start_var = "y", end_var = "z", val = unique(val))
all.equal(tbl, col, check.attributes = FALSE)

tbl <- ts_tbl(x = rep(1:5, 1:5), y = hours(sequence(1:5)), z = 1:15)

win <- id_tbl(x = c(3, 4), a = hours(c(2, 1)), b = hours(c(3, 4)))
hop(tbl, list(z = sum(z)), win, lwr_col = "a", upr_col = "b")
slide_index(tbl, list(z = sum(z)), hours(c(4, 5)), before = hours(2))
slide(tbl, list(z = sum(z)), before = hours(2))

tbl <- ts_tbl(x = rep(3:4, 3:4), y = hours(sequence(3:4)), z = 1:7)
has_no_gaps(tbl)
is_regular(tbl)

tbl[1, 2] <- hours(2)
has_no_gaps(tbl)
is_regular(tbl)

tbl[6, 2] <- hours(2)
has_no_gaps(tbl)
is_regular(tbl)
}
```

id_tbl

Tabular ICU data classes

Description

In order to simplify handling of tabular ICU data, `ricu` provides S3 classes, `id_tbl`, `ts_tbl`, and `win_tbl`. These classes essentially consist of a `data.table` object, alongside some meta data and S3 dispatch is used to enable more natural behavior for some data manipulation tasks. For example, when merging two tables, a default for the `by` argument can be chosen more sensibly if columns representing patient ID and timestamp information can be identified.

Usage

```

id_tbl(..., id_vars = 1L)

is_id_tbl(x)

as_id_tbl(x, id_vars = NULL, by_ref = FALSE)

ts_tbl(..., id_vars = 1L, index_var = NULL, interval = NULL)

is_ts_tbl(x)

as_ts_tbl(x, id_vars = NULL, index_var = NULL, interval = NULL, by_ref = FALSE)

win_tbl(..., id_vars = NULL, index_var = NULL, interval = NULL, dur_var = NULL)

is_win_tbl(x)

as_win_tbl(
  x,
  id_vars = NULL,
  index_var = NULL,
  interval = NULL,
  dur_var = NULL,
  by_ref = FALSE
)

## S3 method for class 'id_tbl'
as.data.table(x, keep.rownames = FALSE, by_ref = FALSE, ...)

## S3 method for class 'id_tbl'
as.data.frame(x, row.names = NULL, optional = FALSE, ...)

validate_tbl(x)

```

Arguments

...	forwarded to <code>data.table::data.table()</code> or generic consistency
id_vars	Column name(s) to be used as id column(s)
x	Object to query/operate on
by_ref	Logical flag indicating whether to perform the operation by reference
index_var	Column name of the index column
interval	Time series interval length specified as scalar-valued <code>difftime</code> object
dur_var	Column name of the duration column
keep.rownames	Default is FALSE. If TRUE, adds the input object's names as a separate column named "rn". <code>keep.rownames = "id"</code> names the column "id" instead.
row.names	NULL or a character vector giving the row names for the data frame. Missing values are not allowed.
optional	logical. If TRUE, setting row names and converting column names (to syntactic names: see <code>make.names</code>) is optional. Note that all of R's <code>base</code> package <code>as.data.frame()</code> methods use <code>optional</code> only for column names treatment, basically with the meaning of <code>data.frame(*, check.names = !optional)</code> . See also the <code>make.names</code> argument of the <code>matrix</code> method.

Details

The introduced classes are designed for several often encountered data scenarios:

- `id_tbl` objects can be used to represent static (with respect to relevant time scales) patient data such as patient age and such an object is simply a `data.table` combined with a non-zero length character vector valued attribute marking the columns tracking patient ID information (`id_vars`). All further columns are considered as `data_vars`.
- `ts_tbl` objects are used for grouped time series data. A `data.table` object again is augmented by attributes, including a non-zero length character vector identifying patient ID columns (`id_vars`), a string, tracking the column holding time-stamps (`index_var`) and a scalar `difftime` object determining the time-series step size `interval`. Again, all further columns are treated as `data_vars`.
- `win_tbl`: In addition to representing grouped time-series data as does a `ts_tbl`, `win_tbl` objects also encode a validity interval for each time-stamped measurement (as `dur_var`). This can for example be useful when a drug is administered at a certain infusion rate for a given time period.

Owing to the nested structure of required meta data, `ts_tbl` inherits from `id_tbl` and `win_tbl` from `ts_tbl`. Furthermore, both classes inherit from `data.table`. As such, `data.table` [reference semantics](#) are available for some operations, indicated by presence of a `by_ref` argument. At default, `value, by_ref` is set to FALSE as this is in line with base R behavior at the cost of potentially incurring unnecessary data copies. Some care has to be taken when passing `by_ref = TRUE` and enabling by reference operations as this can have side effects (see examples).

For instantiating `ts_tbl` objects, both `index_var` and `interval` can be automatically determined if not specified. For the index column, the only requirement is that a single `difftime` column is present, while for the time step, the minimal difference between two consecutive observations

is chosen (and all differences are therefore required to be multiples of the minimum difference). Similarly, for a `win_tbl`, exactly two `difftime` columns are required where the first is assumed to be corresponding to the `index_var` and the second to the `dur_var`.

Upon instantiation, the data might be rearranged: columns are reordered such that ID columns are moved to the front, followed by the index column and a `data.table::key()` is set on meta columns, causing rows to be sorted accordingly. Moving meta columns to the front is done for reasons of convenience for printing, while setting a key on meta columns is done to improve efficiency of subsequent transformations such as merging or grouped operations. Furthermore, NA values in either ID or index columns are not allowed and therefore corresponding rows are silently removed.

Coercion between `id_tbl` and `ts_tbl` (and `win_tbl`) by default keeps intersecting attributes fixed and new attributes are by default inferred as for class instantiation. Each class comes with a class-specific implementation of the S3 generic function `validate_tbl()` which returns TRUE if the object is considered valid or a string outlining the type of validation failure that was encountered.

Validity requires

1. inheriting from `data.table` and unique column names
2. for `id_tbl` that all columns specified by the non-zero length character vector holding onto the `id_vars` specification are available
3. for `ts_tbl` that the string-valued `index_var` column is available and does not intersect with `id_vars` and that the index column obeys the specified interval.
4. for `win_tbl` that the string-valued `dur_var` corresponds to a `difftime` vector and is not among the columns marked as index or ID variables

Finally, inheritance can be checked by calling `is_id_tbl()` and `is_ts_tbl()`. Note that due to `ts_tbl` inheriting from `id_tbl`, `is_id_tbl()` returns TRUE for both `id_tbl` and `ts_tbl` objects (and similarly for `win_tbl`), while `is_ts_tbl()` only returns TRUE for `ts_tbl` objects.

Value

Constructors `id_tbl()/ts_tbl()/win_tbl()`, as well as coercion functions `as_id_tbl()/as_ts_tbl()/as_win_tbl()` return `id_tbl/ts_tbl/win_tbl` objects respectively, while inheritance testers `is_id_tbl()/is_ts_tbl()/is_win_tbl()` return logical flags and `validate_tbl()` returns either TRUE or a string describing the validation failure.

Relationship to `data.table`

Both `id_tbl` and `ts_tbl` inherit from `data.table` and as such, functions intended for use with `data.table` objects can be applied to `id_tbl` and `ts_tbl` as well. But there are some caveats: Many functions introduced by `data.table` are not S3 generic and therefore they would have to be masked in order to retain control over how they operate on objects inheriting from `data.table`. Take for example the function `data.table::setnames()`, which changes column names by reference. Using this function, the name of an index column of an `id_tbl` object can be changed without updating the attribute marking the column as such and thusly leaving the object in an inconsistent state. Instead of masking the function `setnames()`, an alternative is provided as `rename_cols()`. In places where it is possible to seamlessly insert the appropriate function (such as `base::names<-()` or `base::colnames<-()`) and the responsibility for not using `data.table::setnames()` in a way that breaks the `id_tbl` object is left to the user.

Owing to `data.table` heritage, one of the functions that is often called on `id_tbl` and `ts_tbl` objects is `base::[()]`. As this function is capable of modifying the object in a way that makes it incompatible with attached meta data, an attempt is made at preserving as much as possible and if all fails, a `data.table` object is returned instead of an object inheriting from `id_tbl`. If for example the index column is removed (or modified in a way that makes it incompatible with the interval specification) from a `ts_tbl`, an `id_tbl` is returned. If however the ID column is removed the only sensible thing to return is a `data.table` (see examples).

Examples

```
tbl <- id_tbl(a = 1:10, b = rnorm(10))
is_id_tbl(tbl)
is_ts_tbl(tbl)

dat <- data.frame(a = 1:10, b = hours(1:10), c = rnorm(10))
tbl <- as_ts_tbl(dat, "a")
is_id_tbl(tbl)
is_ts_tbl(tbl)

tmp <- as_id_tbl(tbl)
is_ts_tbl(tbl)
is_ts_tbl(tmp)

tmp <- as_id_tbl(tbl, by_ref = TRUE)
is_ts_tbl(tbl)
is_ts_tbl(tmp)

tbl <- id_tbl(a = 1:10, b = rnorm(10))
names(tbl) <- c("c", "b")
tbl

tbl <- id_tbl(a = 1:10, b = rnorm(10))
validate_tbl(data.table::setnames(tbl, c("c", "b")))

tbl <- id_tbl(a = 1:10, b = rnorm(10))
validate_tbl(rename_cols(tbl, c("c", "b")))

tbl <- ts_tbl(a = rep(1:2, each = 5), b = hours(rep(1:5, 2)), c = rnorm(10))
tbl[, c("a", "c"), with = FALSE]
tbl[, c("b", "c"), with = FALSE]
tbl[, list(a, b = as.double(b), c)]
```

Description

The two data classes `id_tbl` and `ts_tbl`, used by `ricu` to represent ICU patient data, consist of a `data.table` alongside some meta data. This includes marking columns that have special

meaning and for data representing measurements ordered in time, the step size. The following utility functions can be used to extract columns and column names with special meaning, as well as query a `ts_tbl` object regarding its time series related meta data.

Usage

`id_vars(x)`

`id_var(x)`

`id_col(x)`

`index_var(x)`

`index_col(x)`

`dur_var(x)`

`dur_col(x)`

`dur_unit(x)`

`meta_vars(x)`

`data_vars(x)`

`data_var(x)`

`data_col(x)`

`interval(x)`

`time_unit(x)`

`time_step(x)`

`time_vars(x)`

Arguments

`x` Object to query

Details

The following functions can be used to query an object for columns or column names that represent a distinct aspect of the data:

- `id_vars()`: ID variables are one or more column names with the interaction of corresponding columns identifying a grouping of the data. Most commonly this is some sort of patient identifier.

- `id_var()`: This function either fails or returns a string and can therefore be used in case only a single column provides grouping information.
- `id_col()`: Again, in case only a single column provides grouping information, this column can be extracted using this function.
- `index_var()`: Suitable for use as index variable is a column that encodes a temporal ordering of observations as `difftime` vector. Only a single column can be marked as index variable and this function queries a `ts_tbl` object for its name.
- `index_col()`: similarly to `id_col()`, this function extracts the column with the given designation. As a `ts_tbl` object is required to have exactly one column marked as index, this function always returns for `ts_tbl` objects (and fails for `id_tbl` objects).
- `dur_var()`: For `win_tbl` objects, this returns the name of the column encoding the data validity interval.
- `dur_col()`: Similarly to `index_col()`, this returns the `difftime` vector corresponding to the `dur_var()`.
- `meta_vars()`: For `ts_tbl` objects, meta variables represent the union of ID and index variables (for `win_tbl`, this also includes the `dur_var()`), while for `id_tbl` objects meta variables consist of ID variables.
- `data_vars()`: Data variables on the other hand are all columns that are not meta variables.
- `data_var()`: Similarly to `id_var()`, this function either returns the name of a single data variable or fails.
- `data_col()`: Building on `data_var()`, in situations where only a single data variable is present, it is returned or if multiple data column exists, an error is thrown.
- `time_vars()`: Time variables are all columns in an object inheriting from `data.frame` that are of type `difftime`. Therefore in a `ts_tbl` object the index column is one of (potentially) several time variables. For a `win_tbl`, however the `dur_var()` is not among the `time_vars()`.
- `interval()`: The time series interval length is represented a scalar valued `difftime` object.
- `time_unit()`: The time unit of the time series interval, represented by a string such as "hours" or "mins" (see `difftime`).
- `time_step()`: The time series step size represented by a numeric value in the unit as returned by `time_unit()`.

Value

Mostly column names as character vectors, in case of `id_var()`, `index_var()`, `data_var()` and `time_unit()` of length 1, else of variable length. Functions `id_col()`, `index_col()` and `data_col()` return table columns as vectors, while `interval()` returns a scalar valued `difftime` object and `time_step()` a number.

Examples

```
tbl <- id_tbl(a = rep(1:2, each = 5), b = rep(1:5, 2), c = rnorm(10),
            id_vars = c("a", "b"))

id_vars(tbl)
tryCatch(id_col(tbl), error = function(...) "no luck")
```

```

data_vars(tbl)
data_col(tbl)

tmp <- as_id_tbl(tbl, id_vars = "a")
id_vars(tmp)
id_col(tmp)

tbl <- ts_tbl(a = rep(1:2, each = 5), b = hours(rep(1:5, 2)), c = rnorm(10))
index_var(tbl)
index_col(tbl)

identical(index_var(tbl), time_vars(tbl))

interval(tbl)
time_unit(tbl)
time_step(tbl)

```

import_src

Data import utilities

Description

Making a dataset available to `ricu` consists of 3 steps: downloading ([download_src\(\)](#)), importing ([import_src\(\)](#)) and attaching ([attach_src\(\)](#)). While downloading and importing are one-time procedures, attaching of the dataset is repeated every time the package is loaded. Briefly, downloading loads the raw dataset from the internet (most likely in `.csv` format), importing consists of some preprocessing to make the data available more efficiently and attaching sets up the data for use by the package.

Usage

```

import_src(x, ...)

## S3 method for class 'src_cfg'
import_src(
  x,
  data_dir = src_data_dir(x),
  tables = NULL,
  force = FALSE,
  verbose = TRUE,
  ...
)

## S3 method for class 'aumc_cfg'
import_src(x, ...)

## S3 method for class 'character'

```

```

import_src(
  x,
  data_dir = src_data_dir(x),
  tables = NULL,
  force = FALSE,
  verbose = TRUE,
  cleanup = FALSE,
  ...
)

import_tbl(x, ...)

## S3 method for class 'tbl_cfg'
import_tbl(
  x,
  data_dir = src_data_dir(x),
  progress = NULL,
  cleanup = FALSE,
  ...
)

```

Arguments

x	Object specifying the source configuration
...	Passed to downstream methods (finally to <code>readr::read_csv/readr::read_csv_chunked</code>)/generic consistency
data_dir	Destination directory where the downloaded data is written to.
tables	Character vector specifying the tables to download. If NULL, all available tables are downloaded.
force	Logical flag; if TRUE, existing data will be re-downloaded
verbose	Logical flag indicating whether to print progress information
cleanup	Logical flag indicating whether to remove raw csv files after conversion to fst
progress	Either NULL or a progress bar as created by <code>progress::progress_bar()</code>

Details

In order to speed up data access operations, `ricu` does not directly use the PhysioNet provided CSV files, but converts all data to `fst::fst()` format, which allows for random row and column access. Large tables are split into chunks in order to keep memory requirements reasonably low.

The one-time step per dataset of data import is fairly resource intensive: depending on CPU and available storage system, it will take on the order of an hour to run to completion and depending on the dataset, somewhere between 50 GB and 75 GB of temporary disk space are required as tables are uncompressed, in case of partitioned data, rows are reordered and the data again is saved to a storage efficient format.

The S3 generic function `import_src()` performs import of an entire data source, internally calling the S3 generic function `import_tbl()` in order to perform import of individual tables. Method

dispatch is intended to occur on objects inheriting from `src_cfg` and `tbl_cfg` respectively. Such objects can be generated from JSON based configuration files which contain information such as table names, column types or row numbers, in order to provide safety in parsing of `.csv` files. For more information on data source configuration, refer to `load_src_cfg()`.

Current import capabilities include re-saving a `.csv` file to `.fst` at once (used for smaller sized tables), reading a large `.csv` file using the `readr::read_csv_chunked()` API, while partitioning chunks and reassembling sub-partitions (used for splitting a large file into partitions), as well as re-partitioning an already partitioned table according to a new partitioning scheme. Care has been taken to keep the maximal memory requirements for this reasonably low, such that data import is feasible on laptop class hardware.

Value

Called for side effects and returns NULL invisibly.

Examples

```
## Not run:

dir <- tempdir()
list.files(dir)

download_src("mimic_demo", dir)
list.files(dir)

import_src("mimic_demo", dir)
list.files(dir)

unlink(dir, recursive = TRUE)

## End(Not run)
```

load_concepts

Load concept data

Description

Concept objects are used in `ricu` as a way to specify how a clinical concept, such as heart rate can be loaded from a data source. Building on this abstraction, `load_concepts()` powers concise loading of data with data source specific preprocessing hidden away from the user, thereby providing a data source agnostic interface to data loading. At default value of the argument `merge_data`, a tabular data structure (either a `ts_tbl` or an `id_tbl`, depending on what kind of concepts are requested), inheriting from `data.table`, is returned, representing the data in wide format (i.e. returning concepts as columns).

Usage

```
load_concepts(x, ...)  
  
## S3 method for class 'character'  
load_concepts(  
  x,  
  src = NULL,  
  concepts = NULL,  
  ...,  
  dict_name = "concept-dict",  
  dict_dirs = NULL  
)  
  
## S3 method for class 'integer'  
load_concepts(  
  x,  
  src = NULL,  
  concepts = NULL,  
  ...,  
  dict_name = "concept-dict",  
  dict_dirs = NULL  
)  
  
## S3 method for class 'numeric'  
load_concepts(x, ...)  
  
## S3 method for class 'concept'  
load_concepts(  
  x,  
  src = NULL,  
  aggregate = NULL,  
  merge_data = TRUE,  
  verbose = TRUE,  
  ...  
)  
  
## S3 method for class 'cncpt'  
load_concepts(x, aggregate = NULL, ..., progress = NULL)  
  
## S3 method for class 'num_cncpt'  
load_concepts(x, aggregate = NULL, ..., progress = NULL)  
  
## S3 method for class 'unt_cncpt'  
load_concepts(x, aggregate = NULL, ..., progress = NULL)  
  
## S3 method for class 'fct_cncpt'  
load_concepts(x, aggregate = NULL, ..., progress = NULL)
```

```

## S3 method for class 'lgl_cncpt'
load_concepts(x, aggregate = NULL, ..., progress = NULL)

## S3 method for class 'rec_cncpt'
load_concepts(
  x,
  aggregate = NULL,
  patient_ids = NULL,
  id_type = "icustay",
  interval = hours(1L),
  ...,
  progress = NULL
)

## S3 method for class 'item'
load_concepts(
  x,
  patient_ids = NULL,
  id_type = "icustay",
  interval = hours(1L),
  progress = NULL,
  ...
)

## S3 method for class 'itm'
load_concepts(
  x,
  patient_ids = NULL,
  id_type = "icustay",
  interval = hours(1L),
  ...
)

```

Arguments

x	Object specifying the data to be loaded
...	Passed to downstream methods
src	A character vector, used to subset the concepts; NULL means no subsetting
concepts	The concepts to be used, or NULL. In the latter case the standard ricu dictionary (obtained by calling load_dictionary()) is used for loading the objects specified in x.
dict_name, dict_dirs	In case not concepts are passed as concepts, these are forwarded to load_dictionary() as name and file arguments
aggregate	Controls how data within concepts is aggregated
merge_data	Logical flag, specifying whether to merge concepts into wide format or return a list, each entry corresponding to a concept

verbose	Logical flag for muting informational output
progress	Either NULL, or a progress bar object as created by progress::progress_bar
patient_ids	Optional vector of patient ids to subset the fetched data with
id_type	String specifying the patient id type to return
interval	The time interval used to discretize time stamps with, specified as base::difftime() object

Details

In order to allow for a large degree of flexibility (and extensibility), which is much needed owing to considerable heterogeneity presented by different data sources, several nested S3 classes are involved in representing a concept and `load_concepts()` follows this hierarchy of classes recursively when resolving a concept. An outline of this hierarchy can be described as

- `concept`: contains many `cncpt` objects (of potentially differing sub-types), each comprising of some meta-data and an `item` object
- `item`: contains many `itm` objects (of potentially differing sub-types), each encoding how to retrieve a data item.

The design choice for wrapping a vector of `cncpt` objects with a container class `concept` is motivated by the requirement of having several different sub-types of `cncpt` objects (all inheriting from the parent type `cncpt`), while retaining control over how this homogeneous w.r.t. parent type, but heterogeneous w.r.t. sub-type vector of objects behaves in terms of S3 generic functions.

Value

An `id_tbl/ts_tbl` or a list thereof, depending on loaded concepts and the value passed as `merge_data`.

Concept

Top-level entry points are either a character vector of concept names or an integer vector of concept IDs (matched against `omopid` fields), which are used to subset a concept object or an entire [concept dictionary](#), or a concept object. When passing a character/integer vector as first argument, the most important further arguments at that level control from where the dictionary is taken (`dict_name` or `dict_dirs`). At concept level, the most important additional arguments control the result structure: data merging can be disabled using `merge_data` and data aggregation is governed by the `aggregate` argument.

Data aggregation is important for merging several concepts into a wide-format table, as this requires data to be unique per observation (i.e. by either `id` or combination of `id` and `index`). Several value types are acceptable as `aggregate` argument, the most important being `FALSE`, which disables aggregation, `NULL`, which auto-determines a suitable aggregation function or a string which is ultimately passed to `dt_gforce()` where it identifies a function such as `sum()`, `mean()`, `min()` or `max()`. More information on aggregation is available as [aggregate\(\)](#). If the object passed as `aggregate` is scalar, it is applied to all requested concepts in the same way. In order to customize aggregation per concept, a named object (with names corresponding to concepts) of the same length as the number of requested concepts may be passed.

Under the hood, a concept object comprises of several `cncpt` objects with varying sub-types (for example `num_cncpt`, representing continuous numeric data or `fct_cncpt` representing categorical

data). This implementation detail is of no further importance for understanding concept loading and for more information, please refer to the [concept](#) documentation. The only argument that is introduced at `cncpt` level is `progress`, which controls progress reporting. If called directly, the default value of `NULL` yields messages, sent to the terminal. Internally, if called from `load_concepts()` at `concept` level (with `verbose` set to `TRUE`), a `progress::progress_bar` is set up in a way that allows nested messages to be captured and not interrupt progress reporting (see `msg_progress()`).

Item

A single `cncpt` object contains an `item` object, which in turn is composed of several `itm` objects with varying sub-types, the relationship `item` to `itm` being that of `concept` to `cncpt` and the rationale for this implementation choice is the same as previously: a container class used representing a vector of objects of varying sub-types, all inheriting from a common super-type. For more information on the `item` class, please refer to the [relevant documentation](#). Arguments introduced at `item` level include `patient_ids`, `id_type` and `interval`. Acceptable values for `interval` are scalar-valued `base::difftime()` objects (see also helper functions such as `hours()`) and this argument essentially controls the time-resolution of the returned time-series. Of course, the limiting factor raw time resolution which is on the order of hours for data sets like **MIMIC-III** or **eICU** but can be much higher for a data set like **HiRID**. The argument `id_type` is used to specify what kind of id system should be used to identify different time series in the returned data. A data set like **MIMIC-III**, for example, makes possible the resolution of data to 3 nested ID systems:

- `patient (subject_id)`: identifies a person
- `hadm (hadm_id)`: identifies a hospital admission (several of which are possible for a given person)
- `icustay (icustay_id)`: identifies an admission to an ICU and again has a one-to-many relationship to `hadm`.

Acceptable argument values are strings that match ID systems as specified by the [data source configuration](#). Finally, `patient_ids` is used to define a patient cohort for which data can be requested. Values may either be a vector of IDs (which are assumed to be of the same type as specified by the `id_type` argument) or a tabular object inheriting from `data.frame`, which must contain a column named after the data set-specific ID system identifier (for **MIMIC-III** and an `id_type` argument of `hadm`, for example, that would be `hadm_id`).

Extensions

The presented hierarchy of S3 classes is designed with extensibility in mind: while the current range of functionality covers settings encountered when dealing with the included concepts and datasets, further data sets and/or clinical concepts might necessitate different behavior for data loading. For this reason, various parts in the cascade of calls to `load_concepts()` can be adapted for new requirements by defining new sub-classes to `cncpt` or `itm` and providing methods for the generic function `load_concepts()` specific to these new classes. At `cncpt` level, method dispatch defaults to `load_concepts.cncpt()` if no method specific to the new class is provided, while at `itm` level, no default function is available.

Roughly speaking, the semantics for the two functions are as follows:

- `cncpt`: Called with arguments `x` (the current `cncpt` object), `aggregate` (controlling how aggregation per time-point and ID is handled), `...` (further arguments passed to downstream

methods) and progress (controlling progress reporting), this function should be able to load and aggregate data for the given concept. Usually this involves extracting the `item` object and calling `load_concepts()` again, dispatching on the `item` class with arguments `x` (the given `item`), arguments passed as `...`, as well as `progress`.

- `itm`: Called with arguments `x` (the current object inheriting from `itm`, `patient_ids` (NULL or a patient ID selection), `id_type` (a string specifying what ID system to retrieve), and `interval` (the time series interval), this function actually carries out the loading of individual data items, using the specified ID system, rounding times to the correct interval and subsetting on patient IDs. As return value, an object of class as specified by the target entry is expected and all `data_vars()` should be named consistently, as data corresponding to multiple `itm` objects concatenated in row-wise fashion as in `base::rbind()`.

Examples

```
if (require(mimic.demo)) {
  dat <- load_concepts("glu", "mimic_demo")

  gluc <- concept("gluc",
    item("mimic_demo", "labevents", "itemid", list(c(50809L, 50931L)))
  )

  identical(load_concepts(gluc), dat)

  class(dat)
  class(load_concepts(c("sex", "age"), "mimic_demo"))
}
```

load_dictionary

Load concept dictionaries

Description

Data concepts can be specified in JSON format as a concept dictionary which can be read and parsed into concept/item objects. Dictionary loading can either be performed on the default included dictionary or on a user-specified custom dictionary. Furthermore, a mechanism is provided for adding concepts and/or data sources to the existing dictionary (see the Details section).

Usage

```
load_dictionary(
  src = NULL,
  concepts = NULL,
  name = "concept-dict",
  cfg_dirs = NULL
)

concept_availability(dict = NULL, include_rec = FALSE, ...)
```

```

explain_dictionary(
  dict = NULL,
  cols = c("name", "category", "description"),
  ...
)

```

Arguments

src	NULL or the name of one or several data sources
concepts	A character vector used to subset the concept dictionary or NULL indicating no subsetting
name	Name of the dictionary to be read
cfg_dirs	File name of the dictionary
dict	A dictionary (concept object) or NULL
include_rec	Logical flag indicating whether to include rec_cncpt concepts as well
...	Forwarded to load_dictionary() in case NULL is passed as dict argument
cols	Columns to include in the output of explain_dictionary()

Details

A default dictionary is provided at

```

system.file(
  file.path("extdata", "config", "concept-dict.json"),
  package = "ricu"
)

```

and can be loaded in to an R session by calling `get_config("concept-dict")`. The default dictionary can be extended by adding a file `concept-dict.json` to the path specified by the environment variable `RICU_CONFIG_PATH`. New concepts can be added to this file and existing concepts can be extended (by adding new data sources). Alternatively, `load_dictionary()` can be called on non-default dictionaries using the `file` argument.

In order to specify a concept as JSON object, for example the numeric concept for glucose, is given by

```

{
  "glu": {
    "unit": "mg/dL",
    "min": 0,
    "max": 1000,
    "description": "glucose",
    "category": "chemistry",
    "sources": {
      "mimic_demo": [
        {

```

```

      "ids": [50809, 50931],
      "table": "labevents",
      "sub_var": "itemid"
    }
  ]
}
}
}

```

Using such a specification, constructors for `cncpt` and `itm` objects are called either using default arguments or as specified by the JSON object, with the above corresponding to a call like

```

concept(
  name = "glu",
  items = item(
    src = "mimic_demo", table = "labevents", sub_var = "itemid",
    ids = list(c(50809L, 50931L))
  ),
  description = "glucose", category = "chemistry",
  unit = "mg/dL", min = 0, max = 1000
)

```

The arguments `src` and `concepts` can be used to only load a subset of a dictionary by specifying a character vector of data sources and/or concept names.

A summary of item availability for a set of concepts can be created using `concept_availability()`. This produces a logical matrix with TRUE entries corresponding to concepts where for the given data source, at least a single item has been defined. If data is loaded for a combination of concept and data source, where the corresponding entry is FALSE, this will yield either a zero-row `id_tbl` object or an object inheriting from `id_tbl` where the column corresponding to the concept is NA throughout, depending on whether the concept was loaded alongside other concepts where data is available or not.

Whether to include `rec_cncpt` concepts in the overview produced by `concept_availability()` can be controlled via the logical flag `include_rec`. A recursive concept is considered available simply if all its building blocks are available. This can, however lead to slightly confusing output as a recursive concept might not strictly depend on one of its sub-concepts but handle such missingness by design. In such a scenario, the availability summary might report FALSE even though data can still be produced.

Value

A concept object containing several data concepts as `cncpt` objects.

Examples

```

if (require(mimic.demo)) {
  head(load_dictionary("mimic_demo"))
  load_dictionary("mimic_demo", c("glu", "lact"))
}

```

load_id	<i>Load data as id_tbl or ts_tbl objects</i>
---------	--

Description

Building on functionality provided by `load_src()` and `load_difftime()`, `load_id()` and `load_ts()` load data from disk as `id_tbl` and `ts_tbl` objects respectively. Over `load_difftime()` both `load_id()` and `load_ts()` provide a way to specify `meta_vars()` (as `id_var` and `index_var` arguments), as well as an interval size (as `interval` argument) for time series data.

Usage

```
load_id(x, ...)

## S3 method for class 'src_tbl'
load_id(
  x,
  rows,
  cols = colnames(x),
  id_var = id_vars(x),
  interval = hours(1L),
  time_vars = ricu::time_vars(x),
  ...
)

## S3 method for class 'character'
load_id(x, src, ...)

## S3 method for class 'itm'
load_id(
  x,
  cols = colnames(x),
  id_var = id_vars(x),
  interval = hours(1L),
  time_vars = ricu::time_vars(x),
  ...
)

## S3 method for class 'fun_itm'
load_id(x, ...)

## Default S3 method:
load_id(x, ...)

load_ts(x, ...)

## S3 method for class 'src_tbl'
```

```
load_ts(  
  x,  
  rows,  
  cols = colnames(x),  
  id_var = id_vars(x),  
  index_var = ricu::index_var(x),  
  interval = hours(1L),  
  time_vars = ricu::time_vars(x),  
  ...  
)  
  
## S3 method for class 'character'  
load_ts(x, src, ...)  
  
## S3 method for class 'itm'  
load_ts(  
  x,  
  cols = colnames(x),  
  id_var = id_vars(x),  
  index_var = ricu::index_var(x),  
  interval = hours(1L),  
  time_vars = ricu::time_vars(x),  
  ...  
)  
  
## S3 method for class 'fun_itm'  
load_ts(x, ...)  
  
## Default S3 method:  
load_ts(x, ...)  
  
load_win(x, ...)  
  
## S3 method for class 'src_tbl'  
load_win(  
  x,  
  rows,  
  cols = colnames(x),  
  id_var = id_vars(x),  
  index_var = ricu::index_var(x),  
  interval = hours(1L),  
  dur_var = ricu::dur_var(x),  
  dur_is_end = TRUE,  
  time_vars = ricu::time_vars(x),  
  ...  
)  
  
## S3 method for class 'character'
```

```

load_win(x, src, ...)

## S3 method for class 'itm'
load_win(
  x,
  cols = colnames(x),
  id_var = id_vars(x),
  index_var = ricu::index_var(x),
  interval = hours(1L),
  dur_var = ricu::dur_var(x),
  dur_is_end = TRUE,
  time_vars = ricu::time_vars(x),
  ...
)

## S3 method for class 'fun_itm'
load_win(x, ...)

## Default S3 method:
load_win(x, ...)

```

Arguments

x	Object for which to load data
...	Generic consistency
rows	Expression used for row subsetting (NSE)
cols	Character vector of column names
id_var	The column defining the id of <code>ts_tbl</code> and <code>id_tbl</code> objects
interval	The time interval used to discretize time stamps with, specified as <code>base::difftime()</code> object
time_vars	Character vector enumerating the columns to be treated as timestamps and thus returned as <code>base::difftime()</code> vectors
src	Passed to <code>as_src_tbl()</code> in order to determine the data source
index_var	The column defining the index of <code>ts_tbl</code> objects
dur_var	The column used for determining durations
dur_is_end	Logical flag indicating whether to use durations as-is or to calculated them by subtracting the <code>index_var</code> column

Details

While for `load_difftime()` the ID variable can be suggested, the function only returns a best effort at fulfilling this request. In some cases, where the data does not allow for the desired ID type, data is returned using the ID system (among all available ones for the given table) with highest cardinality. Both `load_id()` and `load_ts()` are guaranteed to return an object with `id_vars()` set as requested by the `id_var` argument. Internally, the change of ID system is performed by `change_id()`.

Additionally, while times returned by `load_difftime()` are in 1 minute resolution, the time series step size can be specified by the `interval` argument when calling `load_id()` or `load_ts()`. This rounding and potential change of time unit is performed by `change_interval()` on all columns specified by the `time_vars` argument. All time stamps are relative to the origin provided by the ID system. This means that for an `id_var` corresponding to hospital IDs, times are relative to hospital admission.

When `load_id()` (or `load_ts()`) is called on `itm` objects instead of `src_tbl` (or objects that can be coerced to `src_tbl`), The row-subsetting is performed according to the specification as provided by the `itm` object. Furthermore, at default settings, columns are returned as required by the `itm` object and `id_var` (as well as `index_var`) are set accordingly if specified by the `itm` or set to default values for the given `src_tbl` object if not explicitly specified.

Value

An `id_tbl` or a `ts_tbl` object.

Examples

```
if (require(mimic.demo)) {
  load_id("admissions", "mimic_demo", cols = "admission_type")

  dat <- load_ts(mimic_demo$labevents, itemid %in% c(50809L, 50931L),
               cols = c("itemid", "valuenum"))

  glt <- new_itm(src = "mimic_demo", table = "labevents",
               sub_var = "itemid", ids = c(50809L, 50931L))

  identical(load_ts(glt), dat)
}
```

load_src

Low level functions for loading data

Description

Data loading involves a cascade of S3 generic functions, which can individually be adapted to the specifics of individual data sources. At the lowest level, `load_src` is called, followed by `load_difftime()`. Functions up the chain, are described in `load_id()`.

Usage

```
load_src(x, ...)

## S3 method for class 'src_tbl'
load_src(x, rows, cols = colnames(x), ...)

## S3 method for class 'character'
```

```
load_src(x, src, ...)

load_difftime(x, ...)

## S3 method for class 'mimic_tbl'
load_difftime(
  x,
  rows,
  cols = colnames(x),
  id_hint = id_vars(x),
  time_vars = ricu::time_vars(x),
  ...
)

## S3 method for class 'eicu_tbl'
load_difftime(
  x,
  rows,
  cols = colnames(x),
  id_hint = id_vars(x),
  time_vars = ricu::time_vars(x),
  ...
)

## S3 method for class 'hirid_tbl'
load_difftime(
  x,
  rows,
  cols = colnames(x),
  id_hint = id_vars(x),
  time_vars = ricu::time_vars(x),
  ...
)

## S3 method for class 'aumc_tbl'
load_difftime(
  x,
  rows,
  cols = colnames(x),
  id_hint = id_vars(x),
  time_vars = ricu::time_vars(x),
  ...
)

## S3 method for class 'miiv_tbl'
load_difftime(
  x,
  rows,
```

```

    cols = colnames(x),
    id_hint = id_vars(x),
    time_vars = ricu::time_vars(x),
    ...
  )

## S3 method for class 'sic_tbl'
load_diffftime(
  x,
  rows,
  cols = colnames(x),
  id_hint = id_vars(x),
  time_vars = ricu::time_vars(x),
  ...
)

## S3 method for class 'character'
load_diffftime(x, src, ...)

```

Arguments

x	Object for which to load data
...	Generic consistency
rows	Expression used for row subsetting (NSE)
cols	Character vector of column names
src	Passed to <code>as_src_tbl()</code> in order to determine the data source
id_hint	String valued id column selection (not necessarily honored)
time_vars	Character vector enumerating the columns to be treated as timestamps and thus returned as <code>base::difftime()</code> vectors

Details

A function extending the S3 generic `load_src()` is expected to load a subset of rows/columns from a tabular data source. While the column specification is provided as character vector of column names, the row subsetting involves non-standard evaluation (NSE). Data-sets that are included with `ricu` are represented by `prt` objects, which use `rlang::eval_tidy()` to evaluate NSE expressions. Furthermore, `prt` objects potentially represent tabular data split into partitions and row-subsetting expressions are evaluated per partition (see the `part_safe` flag in `prt::subset.prt()`). The return value of `load_src()` is expected to be of type `data.table`.

Timestamps are represented differently among the included data sources: while MIMIC-III and HiRID use absolute date/times, eICU provides temporal information as minutes relative to ICU admission. Other data sources, such as the ICU dataset provided by Amsterdam UMC, opt for relative times as well, but not in minutes since admission, but in milliseconds. In order to smoothen out such discrepancies, the next function in the data loading hierarchy is `load_diffftime()`. This function is expected to call `load_src()` in order to load a subset of rows/columns from a table stored on disk and convert all columns that represent timestamps (as specified by the argument `time_vars`) into `base::difftime()` vectors using `mins` as time unit.

The returned object should be of type `id_tbl`, with the ID vars identifying the ID system the times are relative to. If for example all times are relative to ICU admission, the ICU stay ID should be returned as ID column. The argument `id_hint` may suggest an ID type, but if in the raw data, this ID is not available, `load_difftime()` may return data using a different ID system. In MIMIC-III, for example, data in the `labevents` table is available for `subject_id` (patient ID) or `hadm_id` (hospital admission ID). If data is requested for `icustay_id` (ICU stay ID), this request cannot be fulfilled and data is returned using the ID system with the highest cardinality (among the available ones). Utilities such as `change_id()` can later be used to resolve data to `icustay_id`.

Value

A `data.table` object.

Examples

```
if (require(mimic.demo)) {
tbl <- mimic_demo$labevents
col <- c("charttime", "value")

load_src(tbl, itemid == 50809)

colnames(
  load_src("labevents", "mimic_demo", itemid == 50809, cols = col)
)

load_difftime(tbl, itemid == 50809)

colnames(
  load_difftime(tbl, itemid == 50809, col)
)

id_vars(
  load_difftime(tbl, itemid == 50809, id_hint = "icustay_id")
)

id_vars(
  load_difftime(tbl, itemid == 50809, id_hint = "subject_id")
)
}
```

load_src_cfg

Load configuration for a data source

Description

For a data source to be accessible by `ricu`, a configuration object inheriting from the `S3` class `src_cfg` is required. Such objects can be generated from JSON based configuration files, using `load_src_cfg()`. Information encoded by this configuration object includes available ID systems

(mainly for use in `change_id()`, default column names per table for columns with special meaning (such as index column, value columns, unit columns, etc.), as well as a specification used for initial setup of the dataset which includes file names and column names alongside their data types.

Usage

```
load_src_cfg(src = NULL, name = "data-sources", cfg_dirs = NULL)
```

Arguments

<code>src</code>	(Optional) name(s) of data sources used for subsetting
<code>name</code>	String valued name of a config file which will be looked up in the default config directors
<code>cfg_dirs</code>	Additional directory/ies to look for configuration files

Details

Configuration files are looked for as files name with added suffix `.json` starting with the directory (or directories) supplied as `cfg_dirs` argument, followed by the directory specified by the environment variable `RICU_CONFIG_PATH`, and finally in `extdata/config` of the package install directory. If files with matching names are found in multiple places they are concatenated such that in cases of name clashes. the earlier hits take precedent over the later ones. The following JSON code blocks show excerpts of the config file available at

```
system.file("extdata", "config", "data-sources.json", package = "ricu")
```

A data source configuration entry in a config file starts with a name, followed by optional entries `class_prefix` and further (variable) key-value pairs, such as an URL. For more information on `class_prefix`, please refer to the end of this section. Further entries include `id_cfg` and `tables` which are explained in more detail below. As outline, this gives for the data source `mimic_demo`, the following JSON object:

```
{
  "name": "mimic_demo",
  "class_prefix": ["mimic_demo", "mimic"],
  "url": "https://physionet.org/files/mimiciii-demo/1.4",
  "id_cfg": {
    ...
  },
  "tables": {
    ...
  }
}
```

The `id_cfg` entry is used to specify the available ID systems for a data source and how they relate to each other. An ID system within the context of `ricu` is a patient identifier of which typically several are present in a data set. In MIMIC-III, for example, three ID systems are available: patient IDs (`subject_id`), hospital admission IDs (`hadm_id`) and ICU stay IDs (`icustay_id`). Furthermore

there is a one-to-many relationship between `subject_id` and `hadm_id`, as well as between `hadm_id` and `icustay_id`. Required for defining an ID system are a name, a position entry which orders the ID systems by their cardinality, a table entry, alongside column specifications `id`, `start` and `end`, which define how the IDs themselves, combined with start and end times can be loaded from a table. This gives the following specification for the ICU stay ID system in MIMIC-III:

```
{
  "icustay": {
    "id": "icustay_id",
    "position": 3,
    "start": "intime",
    "end": "outtime",
    "table": "icustays"
  }
}
```

Tables are defined by a name and entries files, defaults, and cols, as well as optional entries `num_rows` and `partitioning`. As files entry, a character vector of file names is expected. For all of MIMIC-III a single `.csv` file corresponds to a table, but for example for HiRID, some tables are distributed in partitions. The defaults entry consists of key-value pairs, identifying columns in a table with special meaning, such as the default index column or the set of all columns that represent timestamps. This gives as an example for a table entry for the `chartevents` table in MIMIC-III a JSON object like:

```
{
  "chartevents": {
    "files": "CHARTEVENTS.csv.gz",
    "defaults": {
      "index_var": "charttime",
      "val_var": "valuenum",
      "unit_var": "valueuom",
      "time_vars": ["charttime", "storetime"]
    },
    "num_rows": 330712483,
    "cols": {
      ...
    },
    "partitioning": {
      "col": "itemid",
      "breaks": [127, 210, 425, 549, 643, 741, 1483, 3458, 3695, 8440,
                 8553, 220274, 223921, 224085, 224859, 227629]
    }
  }
}
```

The optional `num_rows` entry is used when importing data (see `import_src()`) as a sanity check, which is not performed if this entry is missing from the data source configuration. The remaining table entry, `partitioning`, is optional in the sense that if it is missing, the table is not partitioned and

if it is present, the table will be partitioned accordingly when being imported (see `import_src()`). In order to specify a partitioning, two entries are required, `col` and `breaks`, where the former denotes a column and the latter a numeric vector which is used to construct intervals according to which `col` is binned. As such, currently `col` is required to be of numeric type. A partitioning entry as in the example above will assign rows corresponding to `idmid` 1 through 126 to partition 1, 127 through 209 to partition 2 and so on up to partition 17.

Column specifications consist of a name and a `spec` entry alongside a name which determines the column name that will be used by `ricu`. The `spec` entry is expected to be the name of a column specification function of the `readr` package (see `readr::cols()`) and all further entries in a `cols` object are used as arguments to the `readr` column specification. For the admissions table of MIMIC-III the columns `hadm_id` and `admittime` are represented by:

```
{
  ...,
  "hadm_id": {
    "name": "HADM_ID",
    "spec": "col_integer"
  },
  "admittime": {
    "name": "ADMITTIME",
    "spec": "col_datetime",
    "format": "%Y-%m-%d %H:%M:%S"
  },
  ...
}
```

Internally, a `src_cfg` object consist of further S3 classes, which are instantiated when loading a JSON source configuration file. Functions for creating and manipulating `src_cfg` and related objects are marked `internal` but a brief overview is given here nevertheless:

- `src_cfg`: wraps objects `id_cfg`, `col_cfg` and optionally `tbl_cfg`
- `id_cfg`: contains information in ID systems and is created from `id_cfg` entries in config files
- `col_cfg`: contains column default settings represented by `defaults` entries in table configuration blocks
- `tbl_cfg`: used when importing data and therefore encompasses information in `files`, `num_rows` and `cols` entries of table configuration blocks

A `src_cfg` can be instantiated without corresponding `tbl_cfg` but consequently cannot be used for data import (see `import_src()`). In that sense, table config entries `files` and `cols` are optional as well with the restriction that the data source has to be already available in `.fst` format

An example for such a slimmed down config file is available at

```
system.file("extdata", "config", "demo-sources.json", package = "ricu")
```

The `class_prefix` entry in a data source configuration is used create sub- classes to `src_cfg`, `id_cfg`, `col_cfg` and `tbl_cfg` classes and passed on to constructors of `src_env` (`new_src_env()`) and `src_tbl` (`new_src_tbl()`) objects. As an example, for the above `class_prefix` value of

`c("mimic_demo", "mimic")`, the corresponding `src_cfg` will be assigned classes `c("mimic_demo_cfg", "mimic_cfg", "src_cfg")` and consequently the `src_tbl` objects will inherit from `"mimic_demo_tbl"`, `"mimic_tbl"` and `"src_tbl"`. This can be used to adapt the behavior of involved S3 generic function to specifics of the different data sources. An example for this is how `load_difftime()` uses these sub-classes to smoothen out different time-stamp representations. Furthermore, such a design was chosen with extensibility in mind. Currently, `download_src()` is designed around data sources hosted on PhysioNet, but in order to include a dataset external to PhysioNet, the `download_src()` generic can simply be extended for the new class.

Value

A list of data source configurations as `src_cfg` objects.

Examples

```
cfg <- load_src_cfg("mimic_demo")
str(cfg, max.level = 1L)
cfg <- cfg[["mimic_demo"]]
str(cfg, max.level = 1L)

cols <- as_col_cfg(cfg)
index_var(head(cols))
time_vars(head(cols))

as_id_cfg(cfg)
```

min_or_na

Utility functions

Description

Several utility functions exported for convenience.

Usage

`min_or_na(x)`

`max_or_na(x)`

`is_val(x, val)`

`not_val(x, val)`

`is_true(x)`

`is_false(x)`

```
last_elem(x)
```

```
first_elem(x)
```

Arguments

x	Object to use
val	Value to compare against or to use as replacement

Details

The two functions `min_or_na()` and `max_or_na()` overcome a design choice of `base::min()` (or `base::max()`) that can yield undesirable results. If called on a vector of all missing values with `na.rm = TRUE`, `Inf`(and `-Inf`respectively) are returned. This is changed to returning a missing value of the same type.

The functions `is_val()` and `not_val()` (as well as analogously `is_true()` and `is_false()`) return logical vectors of the same length as the value passed as `x`, with non-base R semanticists of comparing against `NA`: instead of returning `c(NA, TRUE)` for `c(NA, 5) == 5`, `is_val()` will return `c(FALSE TRUE)`. Passing `NA` as `val` might lead to unintended results but no warning is thrown.

Finally, `first_elem()` and `last_elem()` has the same semantics as `utils::head()` and `utils::tail()` with `n = 1L` and `replace_na()` will replace all occurrences of `NA` in `x` with `val` and can be called on both objects inheriting from `data.table` in which case internally `data.table::setnafill()` is called or other objects.

Value

- `min_or_na()/max_or_na()`: scalar-valued extrema of a vector
- `is_val()/not_val()/is_true()/is_false()`: Logical vector of the same length as the object passed as `x`
- `first_elem()/last_elem()`: single element of the object passed as `x`
- `replace_na()`: modified version of the object passed as `x`

Examples

```
some_na <- c(NA, sample(1:10, 5), NA)
identical(min(some_na, na.rm = TRUE), min_or_na(some_na))
```

```
all_na <- rep(NA, 5)
min(all_na, na.rm = TRUE)
min_or_na(all_na)
```

```
is_val(some_na, 5)
some_na == 5
```

```
is_val(some_na, NA)
```

```
identical(first_elem(letters), head(letters, n = 1L))
identical(last_elem(letters), tail(letters, n = 1L))
```

```
replace_na(some_na, 11)
```

```

replace_na(all_na, 11)
replace_na(1:5, 11)

tbl <- ts_tbl(a = 1:10, b = hours(1:10), c = c(NA, 1:5, NA, 8:9, NA))
res <- replace_na(tbl, 0)
identical(tbl, res)

```

msg_progress

Message signaling nested with progress reporting

Description

In order to not interrupt progress reporting by a [progress::progress_bar](#), messages are wrapped with class `msg_progress` which causes them to be captured printed after progress bar completion. This function is intended to be used when signaling messages in callback functions.

Usage

```

msg_progress(..., envir = parent.frame())

fmt_msg(msg, envir = parent.frame(), indent = 0L, exdent = 0L)

```

Arguments

<code>...</code>	Passed to base::.makeMessage()
<code>envir</code>	Environment in this objects from <code>msg</code> are evaluated
<code>msg</code>	String valued message
<code>indent, exdent</code>	Vector valued and mapped to fansi::strwrap2_ctl()

Value

Called for side effects and returns NULL invisibly.

Examples

```

msg_progress("Foo", "bar")

capt_fun <- function(x) {
  message("captured: ", conditionMessage(x))
}

tryCatch(msg_progress("Foo", "bar"), msg_progress = capt_fun)

```

new_cncpt

*Data Concepts***Description**

Concept objects are used in *ricu* as a way to specify how a clinical concept, such as heart rate can be loaded from a data source and are mainly consumed by `load_concepts()`. Several functions are available for constructing concept (and related auxiliary) objects either from code or by parsing a JSON formatted concept dictionary using `load_dictionary()`.

Usage

```

new_cncpt(
  name,
  items,
  description = name,
  omopid = NA_integer_,
  category = NA_character_,
  aggregate = NULL,
  ...,
  target = "ts_tbl",
  class = "num_cncpt"
)

is_cncpt(x)

init_cncpt(x, ...)

## S3 method for class 'num_cncpt'
init_cncpt(x, unit = NULL, min = NULL, max = NULL, ...)

## S3 method for class 'unt_cncpt'
init_cncpt(x, unit = NULL, min = NULL, max = NULL, ...)

## S3 method for class 'fct_cncpt'
init_cncpt(x, levels, ...)

## S3 method for class 'cncpt'
init_cncpt(x, ...)

## S3 method for class 'rec_cncpt'
init_cncpt(
  x,
  callback = paste0("rename_data_var('", x[["name"]], "')"),
  interval = NULL,
  ...
)

```

```
new_concept(x)
```

```
concept(...)
```

```
is_concept(x)
```

```
as_concept(x)
```

Arguments

name	The name of the concept
items	Zero or more itm objects
description	String-valued concept description
omopid	OMOP identifier
category	String-valued category
aggregate	NULL or a string denoting a function used to aggregate per id and if applicable per time step
...	Further specification of the cncpt object (passed to init_cncpt())
target	The target object yielded by loading
class	NULL or a string-valued sub-class name used for customizing concept behavior
x	Object to query/dispatch on
unit	A string, specifying the measurement unit of the concept (can be NULL)
min, max	Scalar valued; defines a range of plausible values for a numeric concept
levels	A vector of possible values a categorical concept may take on
callback	Name of a function to be called on the returned data used for data cleanup operations
interval	Time interval used for data loading; if NULL, the respective interval passed as argument to load_concepts() is taken

Details

In order to allow for a large degree of flexibility (and extensibility), which is much needed owing to considerable heterogeneity presented by different data sources, several nested S3 classes are involved in representing a concept. An outline of this hierarchy can be described as

- `concept`: contains many `cncpt` objects (of potentially differing sub-types), each comprising of some meta-data and an `itm` object
- `itm`: contains many `itm` objects (of potentially differing sub-types), each encoding how to retrieve a data item.

The design choice for wrapping a vector of `cncpt` objects with a container class `concept` is motivated by the requirement of having several different sub-types of `cncpt` objects (all inheriting from the parent type `cncpt`), while retaining control over how this homogeneous w.r.t. parent type, but heterogeneous w.r.t. sub-type vector of objects behaves in terms of S3 generic functions.

Each individual `cncpt` object contains the following information: a string-valued name, an `item` vector containing `itm` objects, a string-valued description (can be missing), a string-valued category designation (can be missing), a character vector-valued specification for an aggregation function and a target class specification (e.g. `id_tbl` or `ts_tbl`). Additionally, a sub-class to `cncpt` has to be specified, each representing a different data-scenario and holding further class-specific information. The following sub-classes to `cncpt` are available:

- `num_cncpt`: The most widely used concept type is indented for concepts representing numerical measurements. Additional information that can be specified includes a string-valued unit specification, alongside a plausible range which can be used during data loading.
- `fct_cncpt`: In case of categorical concepts, such as `sex`, a set of factor levels can be specified, against which the loaded data is checked.
- `lgl_cncpt`: A special case of `fct_cncpt`, this allows only for logical values (TRUE, FALSE and NA).
- `rec_cncpt`: More involved concepts, such as a [SOFA score](#) can pull in other concepts. Recursive concepts can build on other recursive concepts up to arbitrary recursion depth. Owing to the more complicated nature of such concepts, a `callback` function can be specified which is used in data loading for concept-specific post-processing steps.
- `unt_cncpt`: A recent (experimental) addition which inherits from `num_cncpt` but instead of manual unit conversion, leverages

Class instantiation is organized in the same fashion as for `item` objects: `concept()` maps vector-valued arguments to `new_cncpt()`, which internally calls the S3 generic function `init_cncpt()`, while `new_concept()` instantiates a concept object from a list of `cncpt` objects (created by calls to `new_cncpt()`). Coercion is only possible from `list` and `cncpt`, by calling `as_concept()` and inheritance can be checked using `is_concept()` or `is_cncpt()`.

Value

Constructors and coercion functions return `cncpt` and concept objects, while inheritance tester functions return logical flags.

Examples

```
if (require(mimic.demo)) {
  gluc <- concept("glu",
    item("mimic_demo", "labevents", "itemid", list(c(50809L, 50931L))),
    description = "glucose", category = "chemistry",
    unit = "mg/dL", min = 0, max = 1000
  )

  is_concept(gluc)

  identical(gluc, load_dictionary("mimic_demo", "glu"))

  gl1 <- new_cncpt("glu",
    item("mimic_demo", "labevents", "itemid", list(c(50809L, 50931L))),
    description = "glucose"
  )
}
```

```

is_cncpt(gl1)
is_concept(gl1)

conc <- concept(c("glu", "lact"),
  list(
    item("mimic_demo", "labevents", "itemid", list(c(50809L, 50931L))),
    item("mimic_demo", "labevents", "itemid", 50813L)
  ),
  description = c("glucose", "lactate")
)

conc

identical(as_concept(gl1), conc[1L])
}

```

new_itm

Data items

Description

Item objects are used in *ricu* as a way to specify how individual data items corresponding to clinical concepts (see also [concept\(\)](#)), such as heart rate can be loaded from a data source. Several functions are available for constructing *itm* (and related auxiliary) objects either from code or by parsing a JSON formatted concept dictionary using [load_dictionary\(\)](#).

Usage

```

new_itm(src, ..., interval = NULL, target = NA_character_, class = "sel_itm")

is_itm(x)

init_itm(x, ...)

## S3 method for class 'sel_itm'
init_itm(x, table, sub_var, ids, callback = "identity_callback", ...)

## S3 method for class 'hrd_itm'
init_itm(x, table, sub_var, ids, callback = "identity_callback", ...)

## S3 method for class 'col_itm'
init_itm(x, table, unit_val = NULL, callback = "identity_callback", ...)

## S3 method for class 'rgx_itm'
init_itm(x, table, sub_var, regex, callback = "identity_callback", ...)

## S3 method for class 'fun_itm'

```

```

init_itm(x, callback, ...)

## S3 method for class 'itm'
init_itm(x, ...)

new_item(x)

item(...)

as_item(x)

is_item(x)

```

Arguments

src	The data source name
...	Further specification of the itm object (passed to <code>init_itm()</code>)
interval	A default data loading interval (either specified as scalar difftime or string such as "00:01:00")
target	Item target class (e.g. "id_tbl"), NA indicates no specific class requirement
class	Sub class for customizing itm behavior
x	Object to query/dispatch on
table	Name of the table containing the data
sub_var	Column name used for subsetting
ids	Vector of ids used to subset table rows. If NULL, all rows are considered corresponding to the data item
callback	Name of a function to be called on the returned data used for data cleanup operations (or a string that evaluates to a function)
unit_val	String valued unit to be used in case no unit_var is available for the given table
regex	String-valued regular expression which will be evaluated by <code>base::grepl()</code> with <code>ignore.case = TRUE</code>

Details

In order to allow for a large degree of flexibility (and extensibility), which is much needed owing to considerable heterogeneity presented by different data sources, several nested S3 classes are involved in representing a concept. An outline of this hierarchy can be described as

- `concept`: contains many cncpt objects (of potentially differing sub-types), each comprising of some meta-data and an `item` object
- `item`: contains many itm objects (of potentially differing sub-types), each encoding how to retrieve a data item.

The design choice for wrapping a vector of itm objects with a container class `item` is motivated by the requirement of having several different sub-types of itm objects (all inheriting from the parent

type `itm`), while retaining control over how this homogeneous w.r.t. parent type, but heterogeneous w.r.t. sub-type vector of objects behaves in terms of S3 generic functions.

The following sub-classes to `itm` are available, each representing a different data-scenario:

- `sel_itm`: The most widely used item class is intended for the situation where rows of interest can be identified by looking for occurrences of a set of IDs (`ids`) in a column (`sub_var`). An example for this is heart rate `hr` on `mimic`, where the IDs 211 and 220045 are looked up in the `itemid` column of `chartevents`.
- `col_itm`: This item class can be used if no row-subsetting is required. An example for this is heart rate (`hr`) on `eicu`, where the table `vitalperiodic` contains an entire column dedicated to heart rate measurements.
- `rgx_itm`: As alternative to the value-matching approach of `sel_itm` objects, this class identifies rows using regular expressions. Used for example for insulin in `eicu`, where the regular expression `^insulin (250.+)?\(((ml|units)/hr)?\)$` is matched against the `drugname` column of `infusiondrug`. The regular expression is evaluated by `base::grepl()` with `ignore.case = TRUE`.
- `fun_itm`: Intended for the scenario where data of interest is not directly available from a table, this `itm` class offers most flexibility. A function can be specified as `callback` and this function will be called with arguments `x` (the object itself), `patient_ids`, `id_type` and `interval` (see `load_concepts()`) and is expected to return an object as specified by the `target` entry.
- `hrd_itm`: A special case of `sel_itm` for HiRID data where measurement units are not available as separate column, but as separate table with units fixed per concept.

All `itm` objects have to specify a data source (`src`) as well as a sub-class. Further arguments then are specific to the respective sub-class and encode information that define data loading, such as the table to query, the column name and values to use for identifying relevant rows, etc. The S3 generic function `init_itm()` is responsible for input validation of class-specific arguments as well as class initialization. A list of `itm` objects, created by calls to `new_itm()` can be passed to `new_item` in order to instantiate an `item` object. An alternative constructor for `item` objects is given by `item()` which calls `new_itm()` on the passed arguments (see examples). Finally `as_item()` can be used for coercion of related objects such as `list`, `concept`, and the like. Several additional S3 generic functions exist for manipulation of `item`-like objects but are marked `internal` (see [item/concept utilities](#)).

Value

Constructors and coercion functions return `itm` and `item` objects, while inheritance tester functions return logical flags.

Examples

```
if (require(mimic.demo)) {
  gluc <- item("mimic_demo", "labevents", "itemid", list(c(50809L, 50931L)),
             unit_var = TRUE, target = "ts_tbl")

  is_item(gluc)

  all.equal(gluc, as_item(load_dictionary("mimic_demo", "glu")))

  hr1 <- new_itm(src = "mimic_demo", table = "chartevents",
```

```

sub_var = "itemid", ids = c(211L, 220045L))

hr2 <- item(src = c("mimic_demo", "eicu_demo"),
  table = c("chartevents", "vitalperiodic"),
  sub_var = list("itemid", NULL),
  val_var = list(NULL, "heartrate"),
  ids = list(c(211L, 220045L), FALSE),
  class = c("sel_itm", "col_itm"))

hr3 <- new_itm(src = "eicu_demo", table = "vitalperiodic",
  val_var = "heartrate", class = "col_itm")

identical(as_item(hr1), hr2[1])
identical(new_item(list(hr1)), hr2[1])
identical(hr2, as_item(list(hr1, hr3)))
}

```

pafi

Concept callback functions

Description

Owing to increased complexity and more diverse applications, recursive concepts (class `rec_cncpt`) may specify callback functions to be called on corresponding data objects and perform post-processing steps.

Usage

```

pafi(
  ...,
  match_win = hours(2L),
  mode = c("match_vals", "extreme_vals", "fill_gaps"),
  fix_na_fio2 = TRUE,
  interval = NULL
)

safi(
  ...,
  match_win = hours(2L),
  mode = c("match_vals", "extreme_vals", "fill_gaps"),
  fix_na_fio2 = TRUE,
  interval = NULL
)

vent_ind(..., match_win = hours(6L), min_length = mins(30L), interval = NULL)

gcs(

```

```

    ...,
    valid_win = hours(6L),
    sed_impute = c("max", "prev", "none", "verb"),
    set_na_max = TRUE,
    interval = NULL
)

urine24(
    ...,
    min_win = hours(12L),
    limits = NULL,
    start_var = "start",
    end_var = "end",
    interval = NULL
)

vaso60(..., max_gap = mins(5L), interval = NULL)

vaso_ind(..., interval = NULL)

supp_o2(..., interval = NULL)

avpu(..., interval = NULL)

bmi(..., interval = NULL)

norepi_equiv(..., interval = NULL)

```

Arguments

...	Data input used for concept calculation
match_win	Time-span during which matching of values is allowed
mode	Method for matching PaO ₂ and FiO ₂ values
fix_na_fio2	Logical flag indicating whether to impute missing FiO ₂ values with 21
interval	Expected time series step size (determined from data if NULL)
min_length	Minimal time span between a ventilation start and end time
valid_win	Maximal time window for which a GCS value is valid if no newer measurement is available
sed_impute	Imputation scheme for values taken when patient was sedated (i.e. unconscious).
set_na_max	Logical flag controlling imputation of missing GCS values with the respective maximum values
min_win	Minimal time span required for calculation of urine/24h
limits	Passed to fill_gaps() in order to expand the time series beyond first and last measurements
start_var, end_var	Passed to fill_gaps()

`max_gap` Maximum time gap between administration windows that are merged (can be negative).

Details

Several concept callback functions are exported, mainly for documenting their arguments, as default values oftentimes represent somewhat arbitrary choices and passing non-default values might be of interest for investigating stability with respect to such choices. Furthermore, default values might not be ideal for some datasets and/or analysis tasks.

pafi:

In order to calculate the PaO₂/FiO₂ (or Horowitz index), for a given time point, both a PaO₂ and an FiO₂ measurement is required. As the two are often not measured at the same time, some form of imputation or matching procedure is required. Several options are available:

- `match_vals` allows for a time difference of maximally `match_win` between two measurements for calculating their ratio
- `extreme_vals` uses the worst PaO₂ and FiO₂ values within the time window spanned by `match_win`
- `fill_gaps` represents a variation of `extreme_vals`, where ratios are evaluated at every time-point as specified by `intervalas` opposed to only the time points where either a PaO₂ or an FiO₂ measurement is available

Finally, `fix_na_fio2` imputes all remaining missing FiO₂ with 21, the percentage (by volume) of oxygen in (tropospheric) air.

vent_ind:

Building on the atomic concepts `vent_start` and `vent_end`, `vent_ind` determines time windows during which patients are mechanically ventilated by combining start and end events that are separated by at most `match_win` and at least `min_length`. Durations are represented by the `dur_var` column in the returned `win_tbl` and the `data_var` column simply indicates the ventilation status with TRUE values. Currently, no clear distinction between invasive and non-invasive ventilation is made.

sed_gcs:

In order to construct an indicator for patient sedation (used within the context of `gcs`), information from the two concepts `ett_gcs` and `rass` is pooled: A patient is considered sedated if intubated or has less or equal to -2 on the Richmond Agitation-Sedation Scale.

gcs:

Aggregating components of the Glasgow Coma Scale into a total score (whenever the total score `tgcs` is not already available) requires coinciding availability of an eye (`egcs`), verbal (`vgcs`) and motor (`mgcs`) score. In order to match values, a last observation carry forward imputation scheme over the time span specified by `valid_win` is performed. Furthermore passing "max" as `sed_impute` will assume maximal points for time steps where the patient is sedated (as indicated by `sed_gcs`), while passing "prev", will assign the last observed value previous to the current sedation window and finally passing FALSE will in turn use raw values. Finally, passing TRUE as `set_na_max` will assume maximal points for missing values (after matching and potentially applying `sed_impute`).

urine24:

Single urine output events are aggregated into a 24 hour moving window sum. At default value of `limits = NULL`, moving window evaluation begins with the first and ends with the last available measurement. This can however be extended by passing an `id_tbl` object, such as for example returned by `stay_windows()` to full stay windows. In order to provide data earlier than 24 hours before the evaluation start point, `min_win` specifies the minimally required data window and the evaluation scheme is adjusted for shorter than 24 hour windows.

vaso60:

Building on concepts for drug administration rate and drug administration durations, administration events are filtered if they do not fall into administrations windows of at least 1h. The `max_gap` argument can be used to control how far apart windows can be in order to be merged (negative times are possible as well, meaning that even overlapping windows can be considered as individual windows).

Value

Either an `id_tbl` or `ts_tbl` depending on the type of concept.

rename_cols

ICU class data utilities

Description

Several utility functions for working with `id_tbl` and `ts_tbl` objects are available, including functions for changing column names, removing columns, as well as aggregating or removing rows. An important thing to note is that as `id_tbl` (and consequently `ts_tbl`) inherits from `data.table`, there are several functions provided by the `data.table` package that are capable of modifying `id_tbl` in a way that results in an object with inconsistent state. An example for this is `data.table::setnames()`: if an ID column or the index column name is modified without updating the attribute marking the column as such, this leads to an invalid object. As `data.table::setnames()` is not an S3 generic function, the only way to control its behavior with respect to `id_tbl` objects is masking the function. As such an approach has its own down-sides, a separate function, `rename_cols()` is provided, which is able to handle column renaming correctly.

Usage

```
rename_cols(
  x,
  new,
  old = colnames(x),
  skip_absent = FALSE,
  by_ref = FALSE,
  ...
)

rm_cols(x, cols, skip_absent = FALSE, by_ref = FALSE)
```

```
change_interval(x, new_interval, cols = time_vars(x), by_ref = FALSE)

change_dur_unit(x, new_unit, by_ref = FALSE)

rm_na(x, cols = data_vars(x), mode = c("all", "any"))

## S3 method for class 'id_tbl'
sort(
  x,
  decreasing = FALSE,
  by = meta_vars(x),
  reorder_cols = TRUE,
  by_ref = FALSE,
  ...
)

is_sorted(x)

## S3 method for class 'id_tbl'
duplicated(x, incomparables = FALSE, by = meta_vars(x), ...)

## S3 method for class 'id_tbl'
anyDuplicated(x, incomparables = FALSE, by = meta_vars(x), ...)

## S3 method for class 'id_tbl'
unique(x, incomparables = FALSE, by = meta_vars(x), ...)

is_unique(x, ...)

## S3 method for class 'id_tbl'
aggregate(
  x,
  expr = NULL,
  by = meta_vars(x),
  vars = data_vars(x),
  env = NULL,
  ...
)

dt_gforce(
  x,
  fun = c("mean", "median", "min", "max", "sum", "prod", "var", "sd", "first", "last",
    "any", "all"),
  by = meta_vars(x),
  vars = data_vars(x),
  na_rm = !fun %in% c("first", "last")
)
```

```
replace_na(x, val, type = "const", ...)
```

Arguments

x	Object to query
new, old	Replacement names and existing column names for renaming columns
skip_absent	Logical flag for ignoring non-existent column names
by_ref	Logical flag indicating whether to perform the operation by reference
...	Ignored
cols	Column names of columns to consider
new_interval	Replacement interval length specified as scalar-valued difftime object
new_unit	New difftime unit for the dur_var column
mode	Switch between all where all entries of a row have to be missing (for the selected columns) or any, where a single missing entry suffices
decreasing	Logical flag indicating the sort order
by	Character vector indicating which combinations of columns from x to use for uniqueness checks
reorder_cols	Logical flag indicating whether to move the by columns to the front.
incomparables	Not used. Here for S3 method consistency
expr	Expression to apply over groups
vars	Column names to apply the function to
env	Environment to look up names in expr
fun	Function name (as string) to apply over groups
na_rm	Logical flag indicating how to treat NA values
val	Replacement value (if type is "const")
type	character, one of "const", "locf" or "nocb". Defaults to "const".

Details

Apart from a function for renaming columns while respecting attributes marking columns a index or ID columns, several other utility functions are provided to make handling of `id_tbl` and `ts_tbl` objects more convenient.

Sorting:

An `id_tbl` or `ts_tbl` object is considered sorted when rows are in ascending order according to columns as specified by `meta_vars()`. This means that for an `id_tbl` object rows have to be ordered by `id_vars()` and for a `ts_tbl` object rows have to be ordered first by `id_vars()`, followed by the `index_var()`. Calling the S3 generic function `base::sort()` on an object that inherits from `id_tbl` using default arguments yields an object that is considered sorted. For convenience (mostly in printing), the column by which the table was sorted are moved to the front (this can be disabled by passing `FALSE` as `reorder_cols` argument). Internally, sorting is handled by either setting a `data.table::key()` in case `decreasing = FALSE` or by calling `data.table::setorder()` in case `decreasing = TRUE`.

Uniqueness:

On object inheriting from `id_tbl` is considered unique if it is unique in terms of the columns as specified by `meta_vars()`. This means that for an `id_tbl` object, either zero or a single row is allowed per combination of values in columns `id_vars()` and consequently for `ts_tbl` objects a maximum of one row is allowed per combination of time step and ID. In order to create a unique `id_tbl` object from a non-unique `id_tbl` object, `aggregate()` will combine observations that represent repeated measurements within a group.

Aggregating:

In order to turn a non-unique `id_tbl` or `ts_tbl` object into an object considered unique, the S3 generic function `stats::aggregate()` is available. This applied the expression (or function specification) passed as `expr` to each combination of grouping variables. The columns to be aggregated can be controlled using the `vars` argument and the grouping variables can be changed using the `by` argument. The argument `expr` is fairly flexible: it can take an expression that will be evaluated in the context of the `data.table` in a clean environment inheriting from `env`, it can be a function, or it can be a string in which case `dt_gforce()` is called. The default value `NULL` chooses a string dependent on data types, where numeric resolves to median, logical to sum and character to first.

As aggregation is used in concept loading (see `load_concepts()`), performance is important. For this reason, `dt_gforce()` allows for any of the available functions to be applied using the GForce optimization of `data.table` (see `data.table::datatable.optimize`).

Value

Most of the utility functions return an object inheriting from `id_tbl`, potentially modified by reference, depending on the type of the object passed as `x`. The functions `is_sorted()`, `anyDuplicated()` and `is_unique()` return logical flags, while `duplicated()` returns a logical vector of the length `nrow(x)`.

Examples

```
tbl <- id_tbl(a = rep(1:5, 4), b = rep(1:2, each = 10), c = rnorm(20),
             id_vars = c("a", "b"))
is_unique(tbl)
is_sorted(tbl)

is_sorted(tbl[order(c)])

identical(aggregate(tbl, list(c = sum(c)), aggregate(tbl, "sum"))

tbl <- aggregate(tbl, "sum")
is_unique(tbl)
is_sorted(tbl)
```

`secs`*Utilities for difftime*

Description

As `base::difftime()` vectors are used throughout `ricu`, a set of wrapper functions are exported for convenience of instantiation `base::difftime()` vectors with given time units.

Usage`secs(...)``mins(...)``hours(...)``days(...)``weeks(...)`**Arguments**

`...` Numeric vector to coerce to `base::difftime()`

Value

Vector valued time differences as `difftime` object.

Examples

```
hours(1L)
mins(NA_real_)
secs(1:10)
hours(numeric(0L))
```

`sep3`*Sepsis 3 label*

Description

The sepsis 3 label consists of a suspected infection combined with an acute increase in SOFA score.

Usage

```

sep3(
  ...,
  si_window = c("first", "last", "any"),
  delta_fun = delta_cummin,
  sofa_thresh = 2L,
  si_lwr = hours(48L),
  si_upr = hours(24L),
  keep_components = FALSE,
  interval = NULL
)

delta_cummin(x)

delta_start(x)

delta_min(x, shifts = seq.int(0L, 23L))


```

Arguments

...	Data objects
si_window	Switch that can be used to filter SI windows
delta_fun	Function used to determine the SOFA increase during an SI window
sofa_thresh	Required SOFA increase to trigger Sepsis 3
si_lwr, si_upr	Lower/upper extent of SI windows
keep_components	Logical flag indicating whether to return the individual components alongside the aggregated score
interval	Time series interval (only used for checking consistency of input data)
x	Vector of SOFA scores
shifts	Vector of time shifts (multiples of the current interval) over which <code>base::pmin()</code> is evaluated

Details

The Sepsis-3 Consensus (Singer et. al.) defines sepsis as an acute increase in the SOFA score (see [sofa_score\(\)](#)) of 2 points or more within the suspected infection (SI) window (see [susp_inf\(\)](#)):

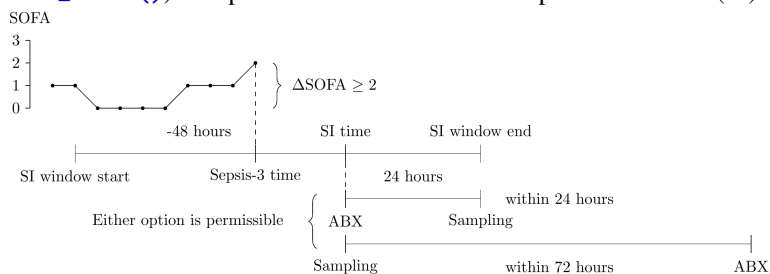

A patient can potentially have multiple SI windows. The argument `si_window` is used to control which SI window we focus on (options are "first", "last", "any").

Further, although a 2 or more point increase in the SOFA score is defined, it is not perfectly clear to which value the increase refers. For this the `delta_fun` argument is used. If the increase is required to happen with respect to the minimal SOFA value (within the SI window) up to the current time, the `delta_cummin` function should be used. If, however, we are looking for an increase with respect to the start of the SI window, then the `delta_start` function should be used. Lastly, the increase might be defined with respect to values of the previous 24 hours, in which case the `delta_min` function is used.

References

Singer M, Deutschman CS, Seymour CW, et al. The Third International Consensus Definitions for Sepsis and Septic Shock (Sepsis-3). *JAMA*. 2016;315(8):801–810. doi:10.1001/jama.2016.0287

setup_src_data	<i>Data setup</i>
----------------	-------------------

Description

Making a dataset available to `ricu` consists of 3 steps: downloading (`download_src()`), importing (`import_src()`) and attaching (`attach_src()`). While downloading and importing are one-time procedures, attaching of the dataset is repeated every time the package is loaded. Briefly, downloading loads the raw dataset from the internet (most likely in .csv format), importing consists of some preprocessing to make the data available more efficiently and attaching sets up the data for use by the package. The download and import steps can be combined using `setup_src_data()`.

Usage

```
setup_src_data(x, ...)
```

Arguments

<code>x</code>	Object specifying the source configuration
<code>...</code>	Forwarded to <code>load_src_cfg()</code> if <code>x</code> is a character vector

Details

If `setup_src_data()` is called on data sources that have all data available with `force = FALSE`, nothing happens apart of a message being displayed. If only a subset of tables is missing, only these tables are downloaded (whenever possible) and imported. Passing `force = TRUE` attempts to re- download and import the entire data set. If the data source is available as a data package (as is the case for the two demo datasets), data is not downloaded and imported, but this package is installed.

In most scenarios, `setup_src_data()` does not need to be called by users, as upon package loading, all configured data sources are set up in a way that enables download of missing data upon first access (and barring user consent). However, instead of accessing all data sources where data missingness should be resolved one by one, `setup_src_data()` is exported for convenience.

Value

Called for side effects and returns NULL invisibly.

sirs_score	<i>SIRS score label</i>
------------	-------------------------

Description

The SIRS (Systemic Inflammatory Response Syndrome) score is a commonly used assessment tool used to track a patient's well-being in an ICU.

Usage

```
sirs_score(
  ...,
  win_length = hours(24L),
  keep_components = FALSE,
  interval = NULL
)
```

```
qsofa_score(
  ...,
  win_length = hours(24L),
  keep_components = FALSE,
  interval = NULL
)
```

```
news_score(
  ...,
  win_length = hours(24L),
  keep_components = FALSE,
  interval = NULL
)
```

```
mews_score(
  ...,
  win_length = hours(24L),
  keep_components = FALSE,
  interval = NULL
)
```

Arguments

...	Data input used for score evaluation
win_length	Window used for carry forward

keep_components	Logical flag indicating whether to return the individual components alongside the aggregated score
interval	Time series interval (only used for checking consistency of input data)

sofa_score	<i>SOFA score label</i>
------------	-------------------------

Description

The SOFA (Sequential Organ Failure Assessment) score is a commonly used assessment tool for tracking a patient's status during a stay at an ICU. Organ function is quantified by aggregating 6 individual scores, representing respiratory, cardiovascular, hepatic, coagulation, renal and neurological systems. The function `sofa_score()` is used as callback function to the `sofa` concept but is exported as there are a few arguments that can be used to modify some aspects of the presented SOFA implementation. Internally, `sofa_score()` calls first `sofa_window()`, followed by `sofa_compute()` and arguments passed as `...` will be forwarded to the respective internally called function.

Usage

```
sofa_score(
  ...,
  worst_val_fun = max_or_na,
  explicit_wins = FALSE,
  win_length = hours(24L),
  keep_components = FALSE,
  interval = NULL
)

sofa_resp(..., interval = NULL)

sofa_coag(..., interval = NULL)

sofa_liver(..., interval = NULL)

sofa_cardio(..., interval = NULL)

sofa_cns(..., interval = NULL)

sofa_renal(..., interval = NULL)
```

Arguments

<code>...</code>	Concept data, either passed as list or individual argument
<code>worst_val_fun</code>	functions used to calculate worst values over windows

explicit_wins	The default FALSE iterates over all time steps, TRUE uses only the last time step per patient and a vector of times will iterate over these explicit time points
win_length	Time-frame to look back and apply the worst_val_fun
keep_components	Logical flag indicating whether to return the individual components alongside the aggregated score (with a suffix _comp added to their names)
interval	Time series interval (only used for checking consistency of input data, NULL will use the interval of the first data object)

Details

The function `sofa_score()` calculates, for each component, the worst value over a moving window as specified by `win_length`, using the function passed as `worst_val_fun`. The default functions `max_or_na()` return NA instead of $-\text{Inf}/\text{Inf}$ in the case where no measurement is available over an entire window. When calculating the overall score by summing up components per time-step, a NA value is treated as 0.

Building on separate concepts, measurements for each component are converted to a component score using the definition by Vincent et. al.:

SOFA score	1	2	3	4
Respiration				
PaO ₂ /FiO ₂ [mmHg] and mechanical ventilation	< 400	< 300	< 200 yes	< 100 yes
Coagulation				
Platelets [$\times 10^3/\text{mm}^3$]	< 150	< 100	< 50	< 20
Liver				
Bilirubin [mg/dl]	1.2-1.9	2.0-5.9	6.0-11.9	> 12.0
Cardiovascular^a				
MAP	< 70 mmHg			
or dopamine		≤ 5	> 5	> 15
or dobutamine		any dose		
or epinephrine			≤ 0.1	> 0.1
or norepinephrine			≤ 0.1	> 0.1
Central nervous system				
Glasgow Coma Score	13-14	10-12	6-9	< 6
Renal				
Creatinine [mg/dl] or urine output [ml/day]	1.2-1.9	2.0-3.4	3.5-4.9 < 500	> 5.0 < 200

Adrenergic^a agents administered for at least 1h (doses given are in $[\mu\text{g}/\text{kg} \cdot \text{min}]$)

At default, for each patient, a score is calculated for every time step, from the first available measurement to the last. In instead of a regularly evaluated score, only certain time points are of interest, this can be specified using the `explicit_wins` argument: passing for example `hours(24, 48)` will yield for every patient a score at hours 24 and 48 relative to the origin of the current ID system (for example ICU stay).

Value

A `ts_tbl` object.

References

Vincent, J.-L., Moreno, R., Takala, J. et al. The SOFA (Sepsis-related Organ Failure Assessment) score to describe organ dysfunction/failure. *Intensive Care Med* 22, 707–710 (1996). <https://doi.org/10.1007/BF01709751>

stay_windows	<i>Stays</i>
--------------	--------------

Description

Building on functionality offered by the (internal) function `id_map()`, stay windows as well as (in case of differing values being passed as `id_type` and `win_type`) an ID mapping is computed.

Usage

```
stay_windows(x, ...)

## S3 method for class 'src_env'
stay_windows(
  x,
  id_type = "icustay",
  win_type = id_type,
  in_time = "start",
  out_time = "end",
  interval = hours(1L),
  patient_ids = NULL,
  ...
)

## S3 method for class 'character'
stay_windows(x, ...)

## S3 method for class 'list'
stay_windows(x, ..., patient_ids = NULL)

## Default S3 method:
stay_windows(x, ...)
```

Arguments

<code>x</code>	Data source (is coerced to <code>src_env</code> using <code>as_src_env()</code>)
<code>...</code>	Generic consistency
<code>id_type</code>	Type of ID all returned times are relative to

win_type	Type of ID for which the in/out times is returned
in_time, out_time	column names of the returned in/out times
interval	The time interval used to discretize time stamps with, specified as <code>base::difftime()</code> object
patient_ids	Patient IDs used to subset the result

Value

An `id_tbl` containing the selected IDs and depending on values passed as `in_time` and `out_time`, start and end times of the ID passed as `win_var`.

See Also

`change_id`

susp_inf	<i>Suspicion of infection label</i>
----------	-------------------------------------

Description

Suspected infection is defined as co-occurrence of of antibiotic treatment and body-fluid sampling.

Usage

```
susp_inf(
  ...,
  abx_count_win = hours(24L),
  abx_min_count = 1L,
  positive_cultures = FALSE,
  si_mode = c("and", "or", "abx", "samp"),
  abx_win = hours(24L),
  samp_win = hours(72L),
  by_ref = TRUE,
  keep_components = FALSE,
  interval = NULL
)
```

Arguments


...	Data and further arguments are passed to <code>si_calc()</code>
abx_count_win	Time span during which to apply the <code>abx_min_count</code> criterion
abx_min_count	Minimal number of antibiotic administrations
positive_cultures	Logical flag indicating whether to require cultures to be positive
si_mode	Switch between and, or, abx, samp modes

abx_win	Time-span within which sampling has to occur
samp_win	Time-span within which antibiotic administration has to occur
by_ref	Logical flag indicating whether to process data by reference
keep_components	Logical flag indicating whether to return the individual components alongside the aggregated score
interval	Time series interval (only used for checking consistency of input data)


Details

Suspected infection can occur in one of the two following ways:

- administration of antibiotics followed by a culture sampling within `samp_win` hours




- culture sampling followed by an antibiotic administration within `abx_win` hours



The default values of `samp_win` and `abx_win` are 24 and 72 hours respectively, as per [Singer et.al.](#) .

The earlier of the two times (fluid sampling, antibiotic treatment) is taken as the time of suspected infection (SI time). The suspected infection window (SI window) is defined to start `si_lwr` hours before the SI time and end `si_upr` hours after the SI time. The default values of 48 and 24 hours (respectively) are chosen as used by [Seymour et.al.](#) (see Supplemental Material).



For some datasets, however, information on body fluid sampling is not available for majority of the patients (eICU data). Therefore, an alternative definition of suspected infection is required. For this, we use administration of multiple antibiotics (argument `abx_min_count` determines the required number) within `abx_count_win` hours. The first time of antibiotic administration is taken as the SI time in this case.

References

- Singer M, Deutschman CS, Seymour CW, et al. The Third International Consensus Definitions for Sepsis and Septic Shock (Sepsis-3). *JAMA*. 2016;315(8):801–810. doi:10.1001/jama.2016.0287
- Seymour CW, Liu VX, Iwashyna TJ, et al. Assessment of Clinical Criteria for Sepsis: For the Third International Consensus Definitions for Sepsis and Septic Shock (Sepsis-3). *JAMA*. 2016;315(8):762–774. doi:10.1001/jama.2016.0288

transform_fun	<i>Item callback utilities</i>
---------------	--------------------------------

Description

For concept loading, item callback functions are used in order to handle item-specific post-processing steps, such as converting measurement units, mapping a set of values to another or for more involved data transformations, like turning absolute drug administration rates into rates that are relative to body weight. Item callback functions are called by `load_concepts()` with arguments `x` (the data), a variable number of name/ string pairs specifying roles of columns for the given item, followed by `env`, the data source environment as `src_env` object. Item callback functions can be specified by their name or using function factories such as `transform_fun()`, `apply_map()` or `convert_unit()`.

Usage

```
transform_fun(fun, ...)

binary_op(op, y)

comp_na(op, y)

set_val(val)

apply_map(map, var = "val_var")

convert_unit(fun, new, rgx = NULL, ignore_case = TRUE, ...)
```

Arguments

<code>fun</code>	Function(s) used for transforming matching values
<code>...</code>	Further arguments passed to downstream function
<code>op</code>	Function taking two arguments, such as <code>+</code>
<code>y</code>	Value passed as second argument to function <code>op</code>
<code>val</code>	Value to replace every element of <code>x</code> with
<code>map</code>	Named atomic vector used for mapping a set of values (the names of <code>map</code>) to a different set (the values of <code>map</code>)
<code>var</code>	Argument which is used to determine the column the mapping is applied to
<code>new</code>	Name(s) of transformed units
<code>rgx</code>	Regular expression(s) used for identifying observations based on their current unit of measurement, <code>NULL</code> means everything
<code>ignore_case</code>	Forwarded to <code>base::grep()</code>

Details

The most forward setting is where a function is simply referred to by its name. For example in eICU, age is available as character vector due to ages 90 and above being represented by the string "> 89". A function such as the following turns this into a numeric vector, replacing occurrences of "> 89" by the number 90.

```
eicu_age <- function(x, val_var, ...) {
  data.table::set(
    data.table::set(x, which(x[[val_var]] == "> 89"), j = val_var,
                    value = 90),
    j = val_var,
    value = as.numeric(x[[val_var]])
  )
}
```

This function then is specified as item callback function for items corresponding to eICU data sources of the age concept as

```
item(src = "eicu_demo", table = "patient", val_var = "age",
     callback = "eicu_age", class = "col_itm")
```

The string passed as callback argument is evaluated, meaning that an expression can be passed which evaluates to a function that in turn can be used as callback. Several function factories are provided which return functions suitable for use as item callbacks: `transform_fun()` creates a function that transforms the `val_var` column using the function supplied as `fun` argument, `apply_map()` can be used to map one set of values to another (again using the `val_var` column) and `convert_unit()` is intended for converting a subset of rows (identified by matching `rgx` against the `unit_var` column) by applying `fun` to the `val_var` column and setting `new` as the transformed unit name (arguments are not limited to scalar values). As transformations require unary functions, two utility function, `binary_op()` and `comp_na()` are provided which can be used to fix the second argument of binary functions such as `*` or `==`. Taking all this together, an item callback function for dividing the `val_var` column by 2 could be specified as `"transform_fun(binary_op(/, 2))"`. The supplied function factories create functions that operate on the data using [by-reference semantics](#). Furthermore, during concept loading, progress is reported by a [progress::progress_bar](#). In order to signal a message without disrupting the current loading status, see [msg_progress\(\)](#).

Value

Callback function factories such as `transform_fun()`, `apply_map()` or `convert_unit()` return functions suitable as item callback functions, while transform function generators such as `binary_op()`, `comp_na()` return functions that apply a transformation to a vector.

Examples

```
dat <- ts_tbl(x = rep(1:2, each = 5), y = hours(rep(1:5, 2)), z = 1:10)

subtract_3 <- transform_fun(binary_op(`-`, 3))
subtract_3(data.table::copy(dat), val_var = "z")
```

```

gte_4 <- transform_fun(comp_na(`>=` , 4))
gte_4(data.table::copy(dat), val_var = "z")

map_letters <- apply_map(setNames(letters[1:9], 1:9))
res <- map_letters(data.table::copy(dat), val_var = "z")
res

not_b <- transform_fun(comp_na(`!=`, "b"))
not_b(res, val_var = "z")

```

write_psv

Read and write utilities

Description

Support for reading from and writing to pipe separated values (.psv) files as used for the PhysioNet Sepsis Challenge.

Usage

```
write_psv(x, dir, na_rows = NULL)
```

```
read_psv(dir, col_spec = NULL, id_var = "stay_id", index_var = NULL)
```

Arguments

x	Object to write to files
dir	Directory to write the (many) files to or read from
na_rows	If TRUE missing time steps are filled with NaN values, if FALSE, rows where all data columns entries are missing are removed and if NULL, data is written as-is
col_spec	A column specification as created by <code>readr::cols()</code>
id_var	Name of the id column (IDs are generated from file names)
index_var	Optional name of index column (will be coerced to difftime)

Details

Data for the PhysioNet Sepsis Challenge is distributed as pipe separated values (.psv) files, split into separate files per patient ID, containing time stamped rows with measured variables as columns. Files are named with patient IDs and do not contain any patient identifiers as data. Functions `read_psv()` and `write_psv()` can be used to read from and write to such a data format.

Value

While `write_psv()` is called for side effects and returns NULL invisibly, `read_psv()` returns an object inheriting from `id_tbl`.

References

Reyna, M., Josef, C., Jeter, R., Shashikumar, S., Moody, B., Westover, M. B., Sharma, A., Nemati, S., & Clifford, G. (2019). Early Prediction of Sepsis from Clinical Data – the PhysioNet Computing in Cardiology Challenge 2019 (version 1.0.0). PhysioNet. <https://doi.org/10.13026/v64v-d857>.

Index

- * **datasets**
 - data, [7](#)
 - .fst, [8](#), [14](#)
- aggregate(), [31](#)
- aggregate.id_tbl(rename_cols), [58](#)
- anyDuplicated.id_tbl(rename_cols), [58](#)
- apply_map(transform_fun), [71](#)
- as.data.frame.id_tbl(id_tbl), [20](#)
- as.data.table.id_tbl(id_tbl), [20](#)
- as_concept(new_cncpt), [49](#)
- as_id_cfg(), [5](#)
- as_id_tbl(id_tbl), [20](#)
- as_item(new_item), [52](#)
- as_src_env(), [5](#)
- as_src_tbl(), [38](#), [41](#)
- as_ts_tbl(id_tbl), [20](#)
- as_win_tbl(id_tbl), [20](#)
- attach_src, [2](#)
- attach_src(), [2](#), [8](#), [14](#), [26](#), [64](#)
- aumc(data), [7](#)
- auto_attach_srcs(data_dir), [11](#)
- auto_attach_srcs(), [3](#)
- avpu(pafi), [55](#)

- base::.First.sys(), [3](#), [15](#)
- base::.makeMessage(), [48](#)
- base::difftime(), [31](#), [32](#), [38](#), [41](#), [62](#), [69](#)
- base::grep(), [71](#)
- base::grepl(), [53](#), [54](#)
- base::makeActiveBinding(), [4](#)
- base::max(), [47](#)
- base::min(), [47](#)
- base::pmin(), [63](#)
- base::rbind(), [33](#)
- base::sort(), [60](#)
- base::subset(), [9](#)
- base::Sys.setenv(), [15](#)
- binary_op(transform_fun), [71](#)
- bmi(pafi), [55](#)

- by-reference semantics, [72](#)

- change_dur_unit(rename_cols), [58](#)
- change_id, [5](#)
- change_id(), [38](#), [42](#), [43](#)
- change_interval(rename_cols), [58](#)
- change_interval(), [39](#)
- cncpt, [35](#)
- collapse(expand), [16](#)
- comp_na(transform_fun), [71](#)
- concept, [32](#), [53](#)
- concept(new_cncpt), [49](#)
- concept dictionary, [31](#)
- concept(), [52](#)
- concept_availability(load_dictionary), [33](#)
- config_paths(data_dir), [11](#)
- convert_unit(transform_fun), [71](#)

- data, [7](#), [15](#)
- data source configuration, [32](#)
- data.frame, [21](#), [25](#)
- data.table, [9](#), [28](#)
- data.table::[()], [18](#)
- data.table::data.table(), [21](#)
- data.table::datatable.optimize, [61](#)
- data.table::key(), [22](#), [60](#)
- data.table::setnafill(), [47](#)
- data.table::setnames(), [22](#), [58](#)
- data.table::setorder(), [60](#)
- data_col(id_vars), [23](#)
- data_dir, [11](#)
- data_dir(), [3](#)
- data_var(id_vars), [23](#)
- data_vars, [21](#)
- data_vars(id_vars), [23](#)
- data_vars(), [18](#), [33](#)
- days(secs), [62](#)
- delta_cummin(sep3), [62](#)
- delta_min(sep3), [62](#)

- delta_start (sep3), 62
- detach_src (attach_src), 2
- difftime, 21, 22, 25
- downgrade_id (change_id), 5
- download_src, 14
- download_src(), 2, 4, 8, 14, 15, 26, 46, 64
- dt_gforce (rename_cols), 58
- dt_gforce(), 31
- duplicated.id_tbl (rename_cols), 58
- dur_col (id_vars), 23
- dur_unit (id_vars), 23
- dur_var, 21
- dur_var (id_vars), 23

- eicu (data), 7
- eicu_demo (data), 7
- expand, 16
- explain_dictionary (load_dictionary), 33

- fansi::strwrap2_ctl(), 48
- fill_gaps (expand), 16
- fill_gaps(), 56
- first_elem (min_or_na), 46
- fmt_msg (msg_progress), 48
- fst::fst(), 3, 27

- gcs (pafi), 55
- get_config (data_dir), 11

- has_gaps (expand), 16
- has_no_gaps (expand), 16
- hirid (data), 7
- hop (expand), 16
- hours (secs), 62
- hours(), 32

- id_col (id_vars), 23
- id_map(), 6, 68
- id_map_helper(), 6
- id_tbl, 20, 28, 51
- id_var (id_vars), 23
- id_vars, 21, 23
- id_vars(), 18, 38, 60, 61
- import_src, 26
- import_src(), 2, 8, 14–16, 26, 44, 45, 64
- import_tbl (import_src), 26
- index_col (id_vars), 23
- index_var, 21
- index_var (id_vars), 23

- index_var(), 60
- init_cncpt (new_cncpt), 49
- init_cncpt(), 50
- init_itm (new_itm), 52
- init_itm(), 53
- install.packages(), 15
- interval, 21
- interval (id_vars), 23
- is_cncpt (new_cncpt), 49
- is_concept (new_cncpt), 49
- is_false (min_or_na), 46
- is_id_tbl (id_tbl), 20
- is_item (new_itm), 52
- is_itm (new_itm), 52
- is_regular (expand), 16
- is_sorted (rename_cols), 58
- is_sorted(), 18
- is_true (min_or_na), 46
- is_ts_tbl (id_tbl), 20
- is_unique (rename_cols), 58
- is_unique(), 18
- is_val (min_or_na), 46
- is_win_tbl (id_tbl), 20
- item, 51
- item (new_itm), 52
- item/concept utilities, 54
- itm, 35, 39, 51

- jsonlite::read_json(), 12, 13
- jsonlite::write_json(), 12, 13

- last_elem (min_or_na), 46
- load_concepts, 28
- load_concepts(), 49, 50, 54, 61, 71
- load_dictionary, 33
- load_dictionary(), 30, 49, 52
- load_difftime (load_src), 39
- load_difftime(), 36, 38, 39, 46
- load_id, 36
- load_id(), 39
- load_src, 39
- load_src(), 36
- load_src_cfg, 42
- load_src_cfg(), 3, 6, 8, 15, 28, 64
- load_ts (load_id), 36
- load_win (load_id), 36

- make.names, 21
- max_or_na (min_or_na), 46

- meta_vars (id_vars), 23
- meta_vars(), 36, 60, 61
- mews_score (sirs_score), 65
- miiv (data), 7
- mimic (data), 7
- mimic_demo (data), 7
- min_or_na, 46
- mins (secs), 62
- msg_progress, 48
- msg_progress(), 32, 72
- new_cncpt, 49
- new_concept (new_cncpt), 49
- new_item (new_itm), 52
- new_itm, 52
- new_src_env(), 45
- new_src_tbl(), 3, 45
- news_score (sirs_score), 65
- norepi_equiv (pafi), 55
- not_val (min_or_na), 46
- openssl::sha256(), 15
- pafi, 55
- progress::progress_bar, 31, 32, 48, 72
- progress::progress_bar(), 27
- prt, 41
- prt::subset.prt(), 41
- qsofa_score (sirs_score), 65
- read_psv (write_psv), 73
- readr::cols(), 45, 73
- readr::read_csv, 27
- readr::read_csv_chunked, 27
- readr::read_csv_chunked(), 28
- rec_cncpt, 55
- reference semantics, 21
- relevant documentation, 32
- remove_gaps (expand), 16
- rename_cols, 58
- rename_cols(), 22
- replace_na (rename_cols), 58
- rlang::eval_tidy(), 41
- rm_cols (rename_cols), 58
- rm_na (rename_cols), 58
- safi (pafi), 55
- secs, 62
- sep3, 62
- set_config (data_dir), 11
- set_val (transform_fun), 71
- setup_src_data, 64
- setup_src_env (attach_src), 2
- sic (data), 7
- sirs_score, 65
- slide (expand), 16
- slide_index (expand), 16
- SOFA score, 51
- sofa_cardio (sofa_score), 66
- sofa_cns (sofa_score), 66
- sofa_coag (sofa_score), 66
- sofa_liver (sofa_score), 66
- sofa_renal (sofa_score), 66
- sofa_resp (sofa_score), 66
- sofa_score, 66
- sofa_score(), 63
- sort.id_tbl (rename_cols), 58
- src_data_dir (data_dir), 11
- src_env, 8, 71
- src_tbl, 8, 39
- stats::aggregate(), 61
- stay_windows, 68
- stay_windows(), 58
- supp_o2 (pafi), 55
- susp_inf, 69
- susp_inf(), 63
- time_step (id_vars), 23
- time_unit (id_vars), 23
- time_vars (id_vars), 23
- transform_fun, 71
- ts_tbl, 28, 51
- ts_tbl (id_tbl), 20
- ts_tbl(), 16
- unique.id_tbl (rename_cols), 58
- upgrade_id (change_id), 5
- urine24 (pafi), 55
- utils::head(), 47
- utils::tail(), 47
- validate_tbl (id_tbl), 20
- vaso60 (pafi), 55
- vaso_ind (pafi), 55
- vent_ind (pafi), 55
- weeks (secs), 62
- win_tbl (id_tbl), 20
- write_psv, 73